
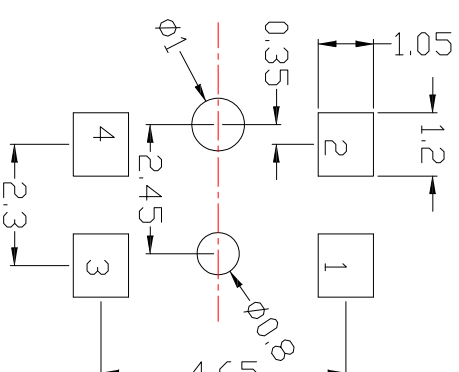
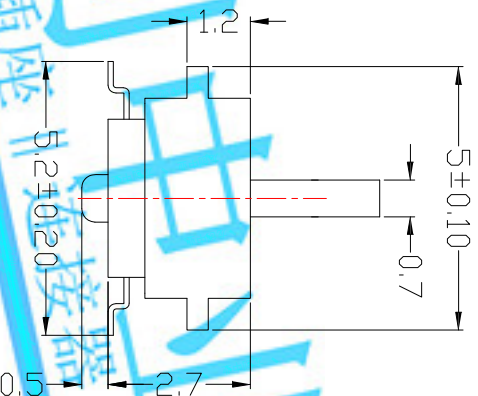
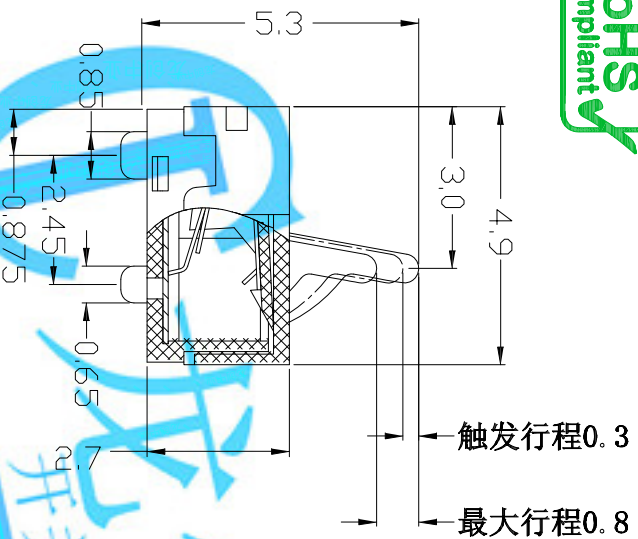


CIRCUIT DIAGRAM

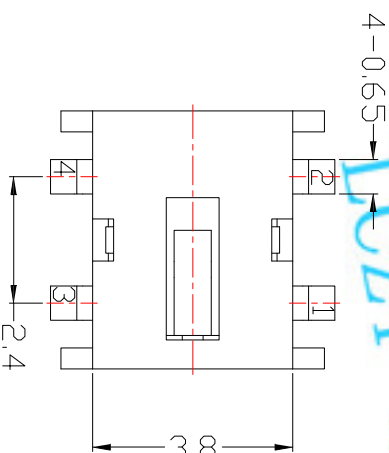

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V, 0.1A.
Contact Resistance	100m Ω Max.
Insulation Resistance	100M Ω Min.
Operating Force	40 $\pm$ 10 gf
Mechanical Life	20,000 cycles

5	TERMINAL	PHOSPHOR BRONZE	1	Ag PLATED
4	COVER	NYLON	1	BLACK
3	SPRING	BeCu	1	Ag PLATED
2	KNOB	NYLON	1	BLACK
1	CASE	NYLON	1	BLACK
NO	NAME	MATERIAL	QTY	FINISHING

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]