




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

RT733-1

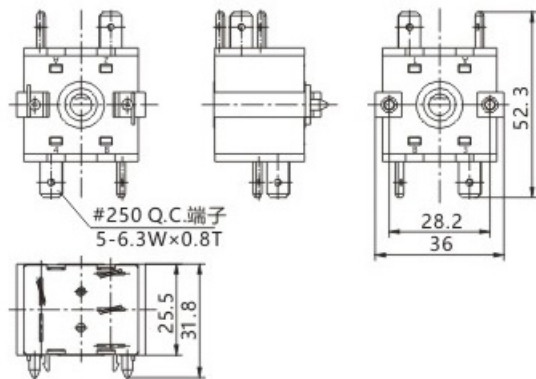

RT733-1
(360° 旋转, 1、2档为30°, 其余270°)
360° revolving, the 1、2 one 30° degree
each the rest 270° degree

档位	0	1	2	3
A	1		●	●
	2	●	●	
B	3			●
	4			

RT733-2
(360° 旋转, 1、2档为30°, 其余270°)
360° revolving, the 1、2 one 30° degree
each the rest 270° degree

档位	0	1	2	3
A	1		●	●
	2	●	●	
B	3			●
	4	●	●	●

电气参数

Operating data:

8A 125VAC T100

16A 250VAC T100

项 目	Item	参 数	Parameter
额定电压、电压 Rated voltage Rated current		10(16)A 250V	
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L					
6						SEE NOTE		TITLE:	Appliance Switch		
5						FINISH		DR:	DWG NO.:		
4						SEE NOTE		CHKD:	RT733-1		
3						Q'TY		APPD:	SCALE	SHEET	REV.
2						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE			4:1	1/1	A
1											CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING							