


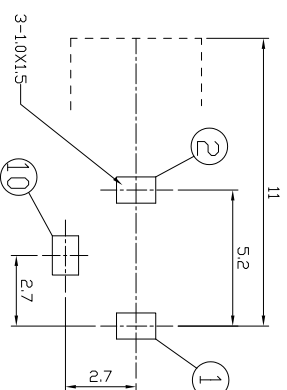


DIMENSIONS

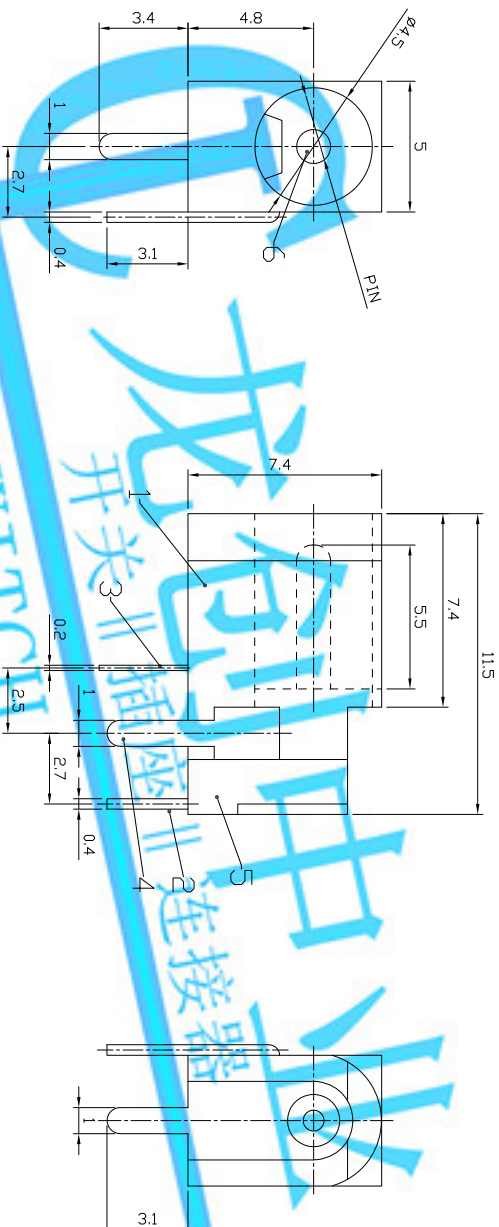

DC MATE PLUG

Model No.	C	E
CENTER PIN	Ø1.0	Ø1.3

P.C.B LAYOUT

MODEL CODE:

DCE0-03130- A □ 66 BK S 0 4

(1) (2) (3) (4) (5) (6) (7) (8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter

C=Ø1.0 , E=Ø1.3

(5):Material of housing:

66=PA66

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8): Special option:

0=No special option

(9)Packing mode:

4=Bag packing

Specification:

1.Ra.ting :DC 30V 0.3A.

2.Contact resistance : $\leq 100\text{m}\Omega$

3. Insulation resistance : $\geq 100M\Omega$ (500VDC).

4. Withstanding voltage: 500VAC

5. Insertion and extraction force: 0.3~3Kgs.

6.life test: 5000cycles min.

7. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$

Bill of materials:

[illegible]