

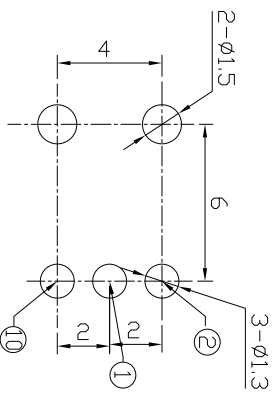


DIMENSIONS

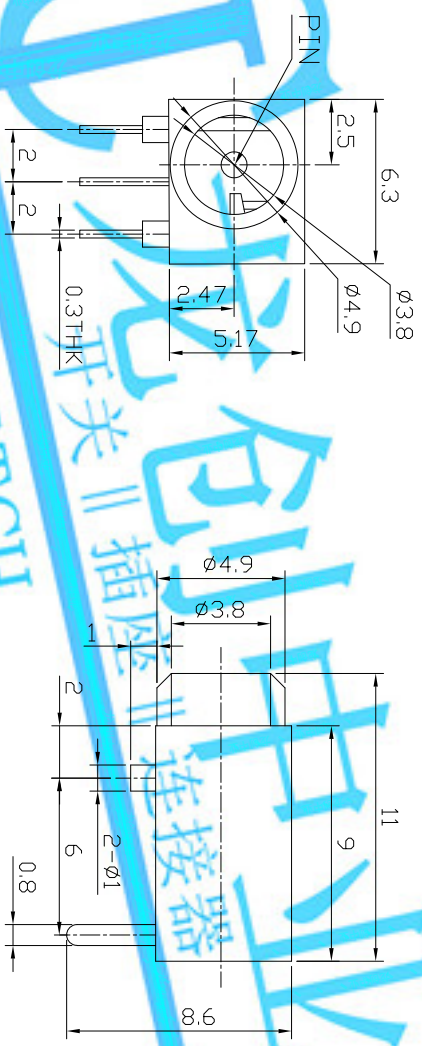


P.C.B LAYOUT

Model No.	C	E
CENTER PIN	ø1.0	ø1.3



DC MATE PLUG



MODEL CODE:
DCE0-04130- A □ 66 BK S 0 4
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1):Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A
(4):Center pin diameter:
C=ø1.0 , E=ø1.3
(5):Material of housing:
66=PA66
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
4=Bag packing

Specification:
1.Rating :DC 30V 0.3A.
2.Contact resistance :≤100mΩ.
3.Insulation resistance :≥100MΩ (500VDC).
4.Withstanding voltage: 500VAC .
5.Insertion and extraction force: 0.3~3Kgs.
6.life test: 5000cycles min.
7.Operaton temperature range:-25°C~85°C

Bill of materials:

						LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
					GENERAL TOLERANCE	UNITS	TITLE: DIP DC POWER JACK		
					WITHIN 1.5mm±0.1mm	mm			
6	PIN	BRASS	1	NI PLATED		SEE NOTE	DWG NO.: AZJ-04130		
5	COVER	NYLON+F.G	1	BLACK		FINISH			
4	TERMINAL	BRASS STRIP	1	AG PLATED		SEE NOTE	CHKD: Rocky 2019/03/20		
3	SPRING TERMINAL	PBS STRIP	1	AG PLATED		Q'TY			
2	TERMINAL	BRASS STRIP	1	AG PLATED					
1	CASE	NYLON+F.G	1	BLACK					
NO.	PARTS	MATERIAL	Q'TY	FINISHING					
									
									
					APPD:				
					DR: Rocky 2019/03/20				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED WITHOUT WRITTEN CONSENT OF ACCURATE INNOTECH INC.				