

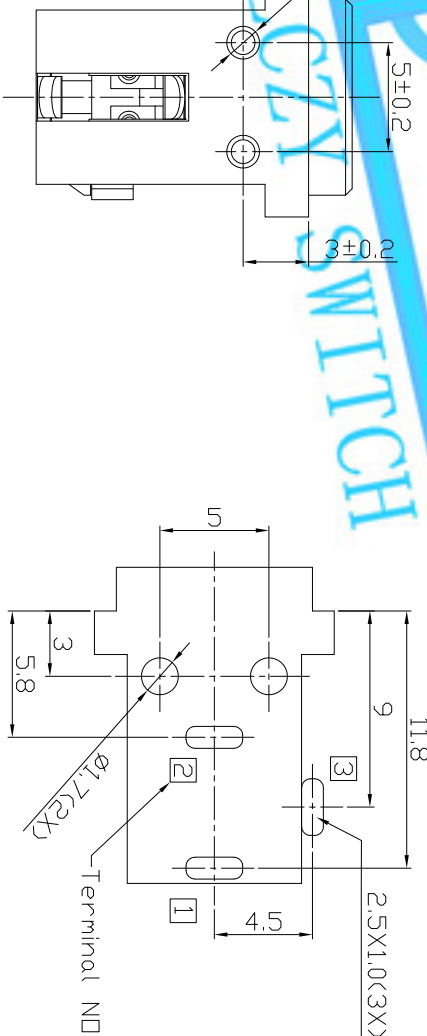


Q: ITEM NO.	D: TERMINAL NO.
-------------	-----------------




RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05



DC MATE PLUG

SPECIFICATION:

1. Rating : DC 30V 2A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC500V);
After test: $\geq 50M\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. Life test: 5,000 cycles;
7. Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$;
8. Preservative temperature range: $-40^{\circ}C \sim 85^{\circ}C$.

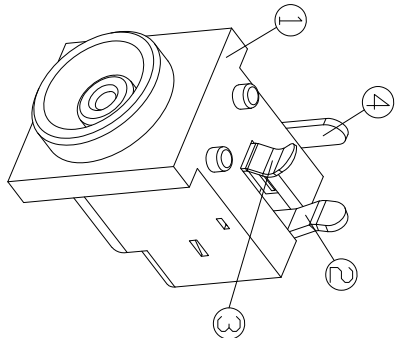

LONGCHUANG ZHONGYE (HK) CO., LIMITED