

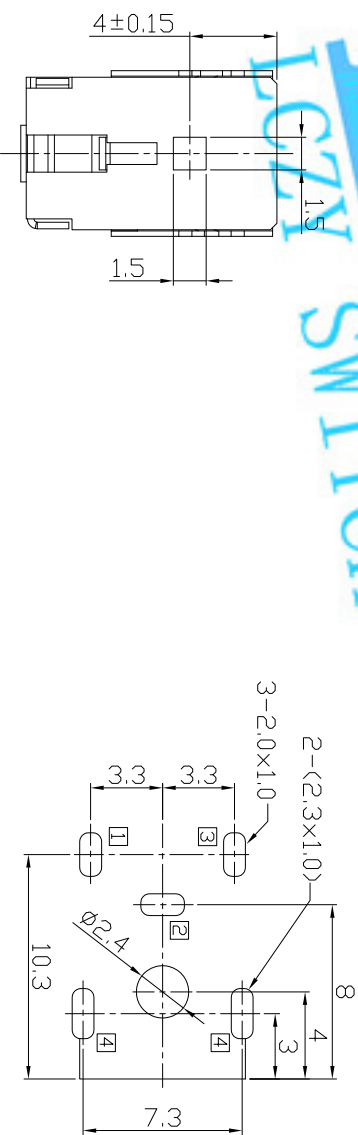
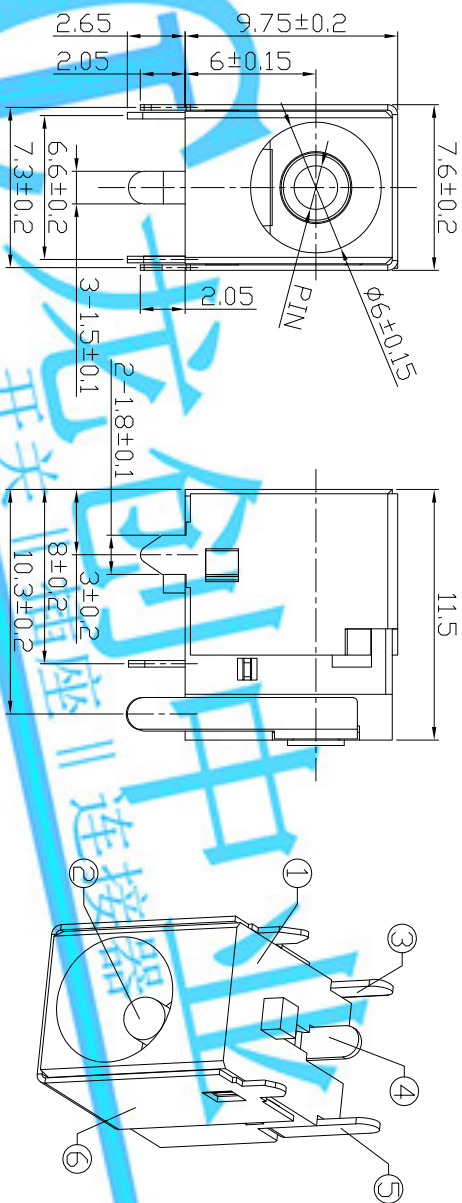





MODEL CODE:
DCB0-0036B- A □ PB BK S 0 4
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1):Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A , B
(4):Center pin diameter:
G=φ1.65 , H=φ2.0 , I=φ2.35 , J=φ2.5
(5):Material of housing:
PB=PBT (Standard)
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
4=Bag packing

SPECIFICATION:
1.Rating : DC 20V 3A;
2.Contact resistance: ≤30m Ω;
3.Insulation resistance: ≥100M Ω (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3~30N;
6.Life test: 5,000 cycles;
7.Operation temperature range:-20℃~70℃;
8.Preservative temperature range:-40℃~85℃;



PCB HOLES(BOTTOM VIEW) t=1.6mm
NOTE:GENERAL TOLERANCE:±0.05mm

○:ITEM NO. □:TERMINAL NO.

⑥	Shield plate	④	Brass	t=0.25	1	Nickel(Ni) Plating	TOLERANCE	ANGLES	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED																	
⑤	Shunt terminal	③	Brass	t=0.3	1	Silver(Ag) Plating	±0.3	±2°	MAT'L						mm												
④	Tip spring	②	SUS301	t=0.3	1	Silver(Ag) Plating			SEE NOTE																		
③	Center pin terminal	①	Brass	t=0.3	1	Silver(Ag) Plating			FINISH																		
②	Center pin	①	Brass		1	Nickel(Ni) Plating			SEE NOTE																		
①	Housing		PBT	UL94V-0	1				Q'TY	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.																	
ND.	PARTS		MATERIAL		Q'TY	FINISHING																					
										TITLE:		DIP DC POWER JACK		PART NO.:		DWG NO.:		SCALE		SHEET		REV.		CUSTOMER DRAWING			
																AB0-0036B		1:1		1/1		A					