


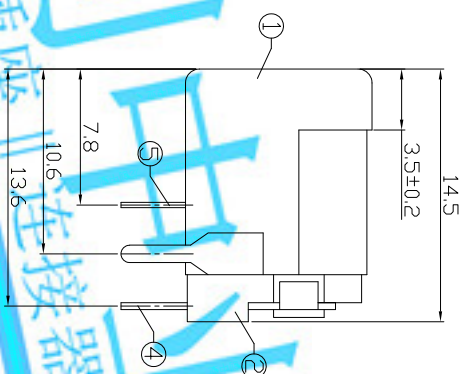
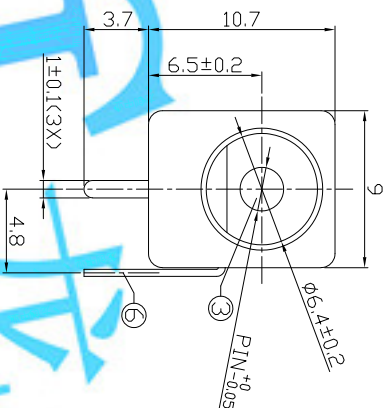


DIMENSIONS



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(BOTTOM VIEW)

Model No.	H	I	J
CENTER PIN	ø2.0	ø2.35	ø2.5



MODEL CODE:

DCB0-5006B-	A	□	PB	BK	I	Q	3
-------------	---	---	----	----	---	---	---

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:IP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:
H=Ø2.0 , I=Ø2.35 , J=Ø2.5

(5):Material of housing:
PB=PBT (Standard)

(6):Housing color:
BK=Black

(7):Terminal plating
T=Ti(Sn)

(8):Special option:
0=Center pin CuSn plating
N=Center pin Nickel plating

(9):Packing mode:
3=Plastic box packing
4=Bag packing

REV.	ECN. NO.	APPD

O: ITEM NO. □: TERMINAL NO.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
⑥		Shunt terminal ③	Brass t=0.4	1	Tin plating	TOLERANCE	ANGLES	UNITS	TITLE: PART NO.: DIP DC POWER JACK DCB0-5006B
⑤		Tip spring ②	Phosphor bronze t=0.3	1	Tin plating	±0.3	±2°	MAT'L mm	
④		Center pin terminal ①	Brass t=0.4	1	Tin plating			SEE NOTE	
③		Center pin ①	Copper alloy	1	CuSn/Nickel plating			FINISH	
②		Cover	PBT	1	Black			SEE NOTE	DWG NO.: AB0-5006B
①		Housing	PBT	1	Black			Q'TY	
ND.		PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INMTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INMTECH INC.			
									CUSTOMER DRAWING