Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

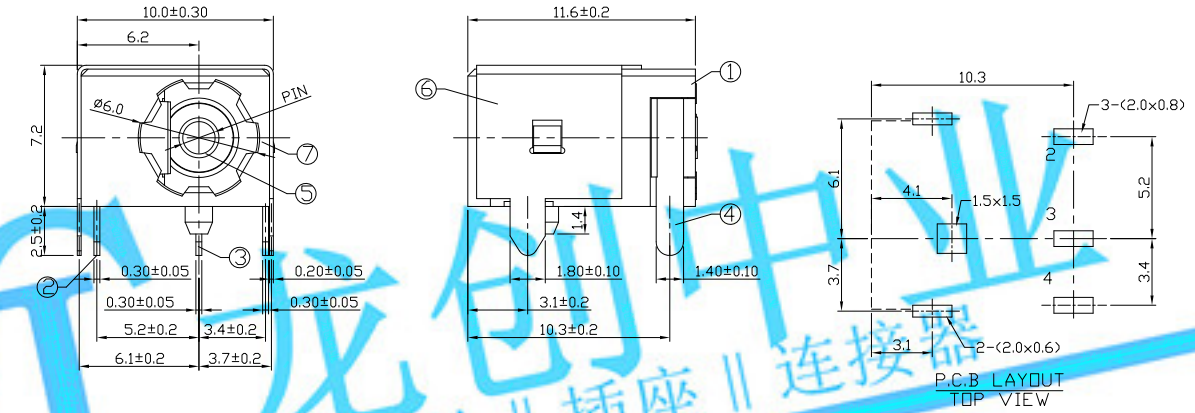

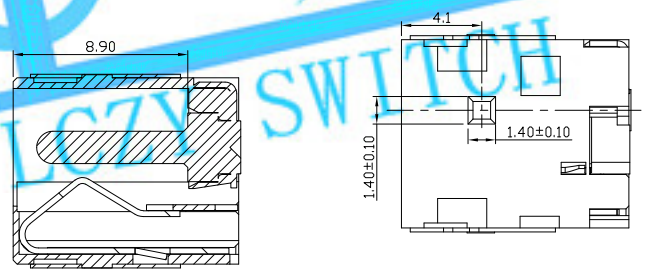

MODEL CODE:

DCS0-0217B- A □ 9T BK S 0 3

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A
(4):Center pin diameter:
G=Ø1.65 , H=Ø2.0 , J=Ø2.5
(5):Material of housing:
9T=PA9T
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
1=Reel packing
3=Plastic box packing

Specification:
1.Rating :DC 24V 5A.
2.Contact resistance :≤50mΩ.
3.Insulation resistance :≥100MΩ (DC500V).
4.Withstanding voltage: 500VAC .
5.Insertion and extraction force: 3~30N.
6.life test: 5000cycles min.
7.Operation temperature range:-25°C~85°C





DC MATE PLUG

Model No.	G	H	J
CENTER PIN	Ø1.65	Ø2.0	Ø2.5

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING
7	COVER	SUS301	1	Ni 60U" Min
6	CONTACT FOOT	C2680	1	Tin 100U" Min
5	PIN	C2680	1	U" MinNi 60
4	CONTACT FOOT	C2680	1	Ag 10U"Min
3	CURVE PIECE	C2680	1	Ag 10U"Min
2	SPRING PIECE	C5210	1	Ag 10U"Min
1	HOUSING	PA9T	1	Black

TOLERANCE	ANGLES
.X ± 0.3	X°.±5°
.XX ± 0.2	.X°±3°
.XXX ± 0.1	

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: DIP DC POWER JACK	PART NO.: DCS0-0217B
DR: Ricky 2019/03/21	DWG NO.: ASS-0217B
CHKD: Ricky 2019/03/21	SCALE 1:1 / SHEET 1/1 / REV. A / CUSTOMER DRAWING
APPD:	

龙创中业 开关 | 插座 | 连接器 LCZY SWITCH