
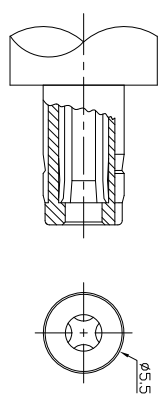

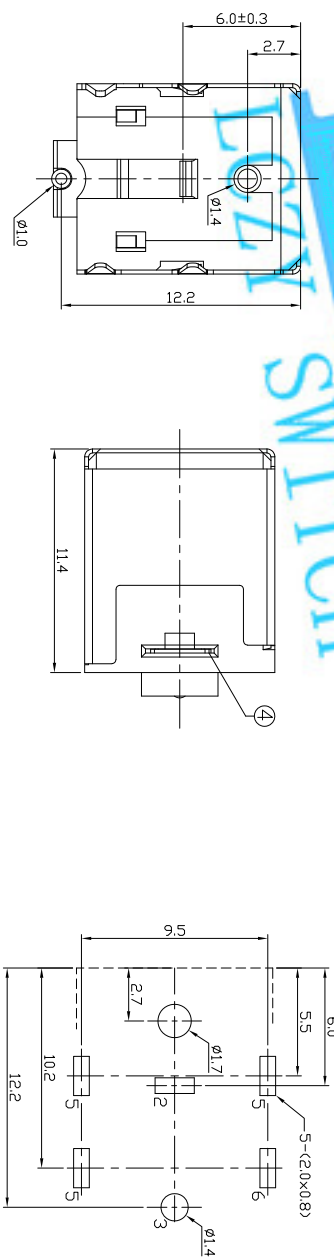
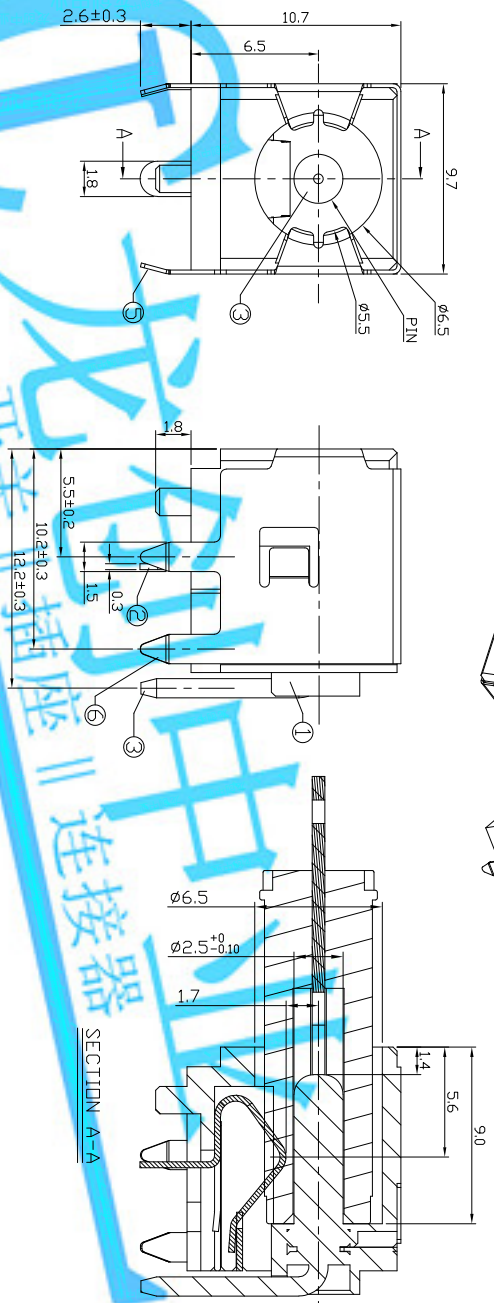


DIMENSIONS



Specification:
1.Rating : DC 24V 10A.
2.Contact resistance : ≤100mΩ.
3.Insulation resistance : ≥100MΩ (DC500V).
4.Withstanding voltage: 500VAC .
5.Insertion and extraction force: 3~30N.
6.life test: 5000cycles min.
7.Operation temperature range:-25℃~85℃

Model No.	H	J
CENTER PIN	ø2.0	ø2.5

Bill of materials:

		TOLERANCE	ANGLES	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		X ± 0.3	X°±5°	mm				
6	CONTACT FOOT	C2680-EH	1	Ni:50u"Min,Tin:100u"Min	TITLE:	DIP DC POWER JACK	PART NO.:	DCS0-0335C
5	CONTACT FOOT	SUS301-H	1	Ni:50u"Min	DR:	Rocky 2019/03/21	DWG NO.:	ASS-0335C
4	STOPPER	SUS301-H	1	N/A	FINISH	SEE NOTE	SCALE	SHEET 1/1
3	PIN	H59-H	1	Ni:50u"Min	Q'TY	1	REV.	A
2	SPRING PIECE	C5210-EH	1	Ni:50u"Min,Tin:100u"Min	CHKD:	Rocky 2019/03/21	CUSTOMER DRAWING	
1	HOUSING	PA9T GN2330	1	BLACK UL94-V0	APPD:	1:1		
PARTS		Q'TY	FINISHING					