

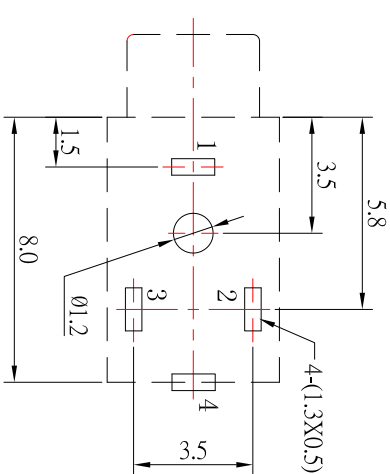
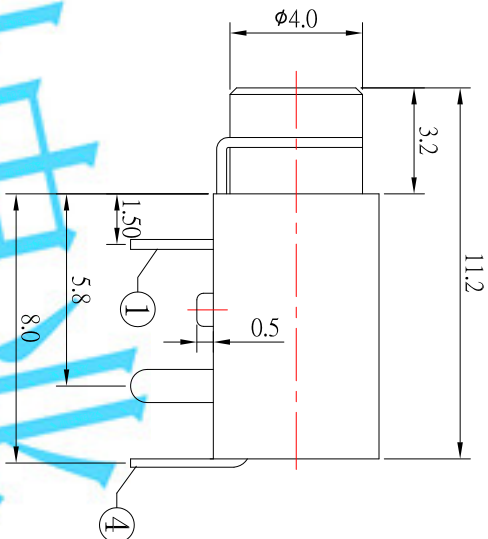
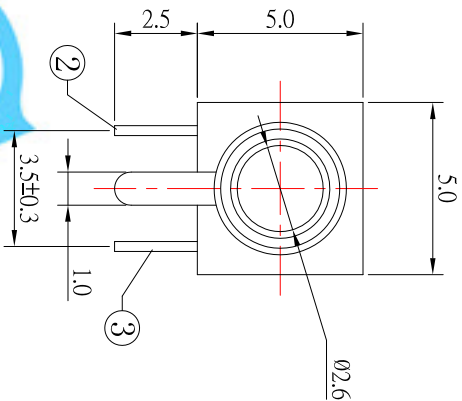


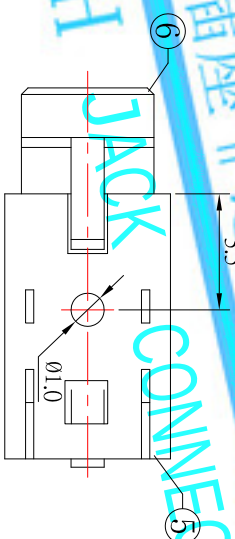

P.C.B LAYOUT
TOP VIEW



SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	HOUSING	1	PBT	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY: DATE: Jack Lu 02/21/17

CHECKED BY: DATE: FINISH Jacky Chen 02/21/17

APPROVED BY: DATE: SCALE 1 : 1 DWG NO. PJ-255-S124

Tony Kao 02/21/17 SHEET NO. 1 of 1 PART NO. PJ-255-S124

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED : Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S
UNITS
MM

ITEM NO. DESCRIPTION DRAWN DATE

A B C D E F G H I J