

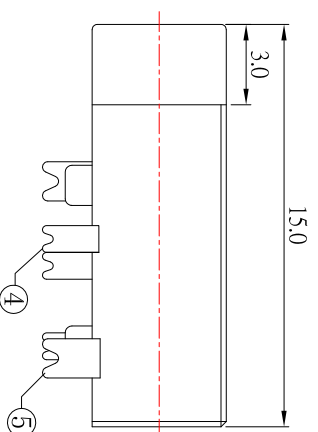



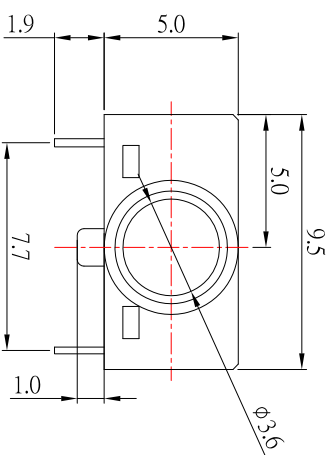


P.C.B LAYOUT
TOP VIEW

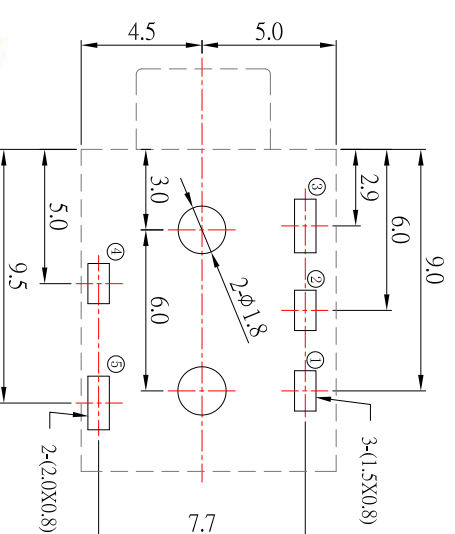


SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 0.05 \Omega$;
3. Insulation resistance : $\geq 100 M\Omega$ (DC250V) ;
4. Withstand voltage : 500V AC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

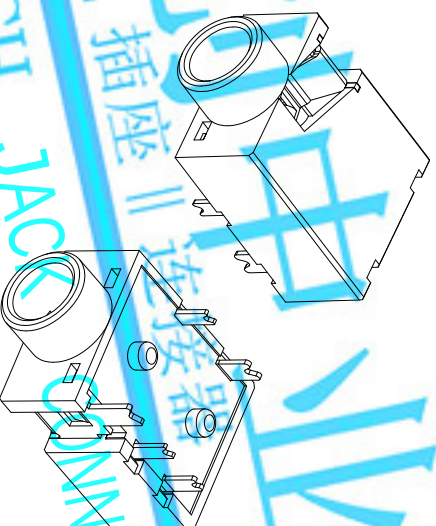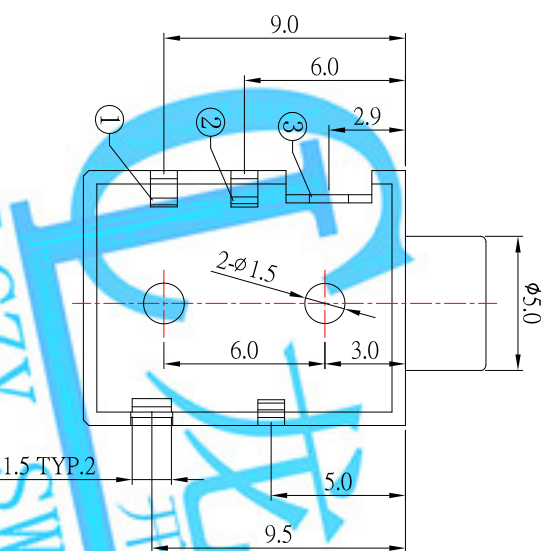

SCHEMATIC

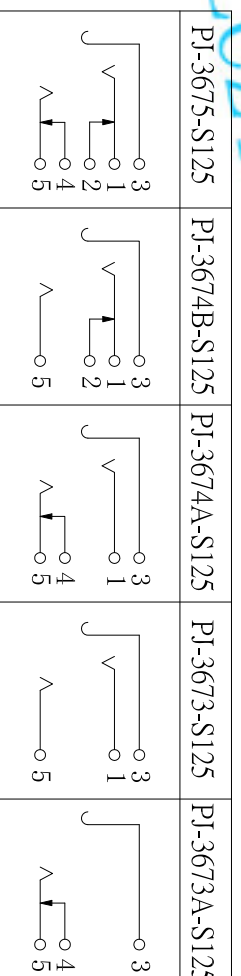[illegible]