
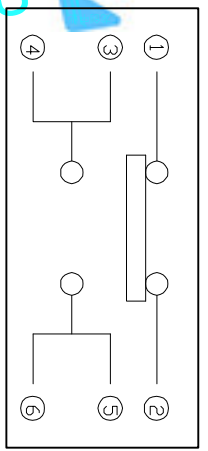


DIMENSIONS

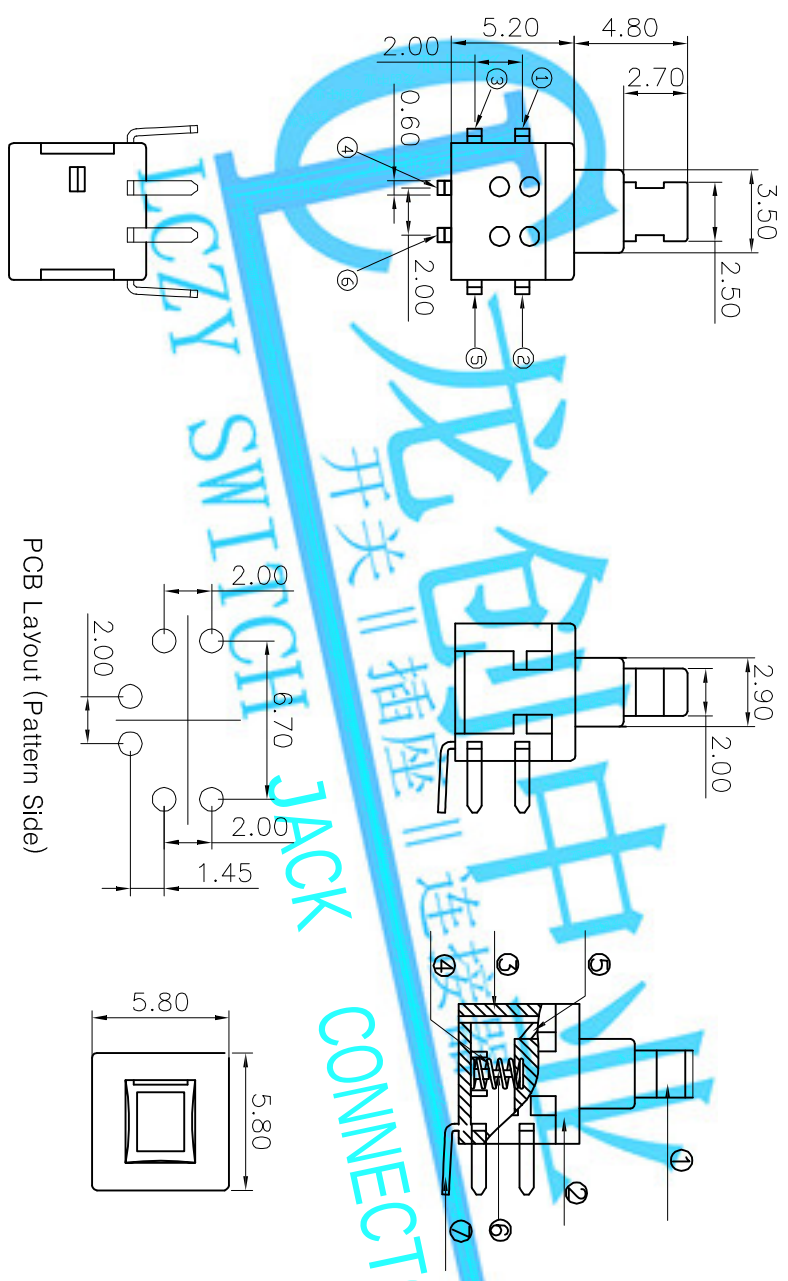

RATING	0.2A 12V DC	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	SELF-LOCK	AP-2216JL
OPERATING MODE	NON-SHORTING	AP-2216JN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	180±50gf	
OPERATING LIFE(cycles)	10,000	

9					WITHIN 1.5mm; ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8					OVER 1.5mm; ±0.2mm	MAT'L					
7						SEE NOTE					
6						SEE NOTE					
5	SPRING	SUS	1	NATURAL		FINISH		TITLE: PUSH SWITCH / HORIZONTAL PART NO.: AP-2216J			
4	CAM STICK	SUS	1	NATURAL		SEE NOTE					
3	CASE	PA66/BRASS STRIP	1	GREY/Aq PLATED		DR: <i>Rocky</i> 2016/02/19	DWG NO.:	ADL-2216J			
2	COVER	PBT	1	BLACK		CHKD: <i>Rocky</i> 2016/02/19	SCALE				
1	KNDB	PBT	1	WHITE/Aq CLAD		Q'TY					
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	5:1				
							1/1	A		CUSTOMER DRAWING	