







REV	DESCRIPTION	DESIGNER	DATE	自由公差			
					类别		
					区分	公差	
					0	<0.5	±0.10
					0.50	<5	±0.15
					5.0	<10	±0.20
					10.0	<20	±0.30
					20.0	<50	±0.40
					未标注R角		R0.2
					未标注角度公差		±1°

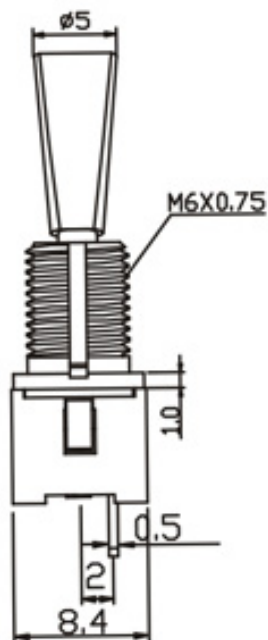

12VDC 0.1A

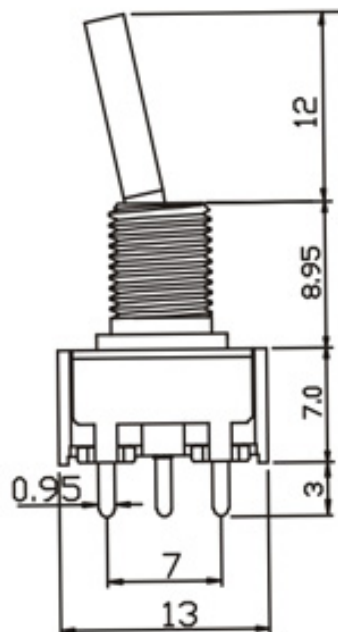

- 1.规格 Rating:5A 125VAC;2A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
- 4.耐电压 Dielectric Strength:1500VAC ,1Minute
- 5.操作温度 Operating Temperature:-25℃ ~ +85℃
- 6.电气寿命 Electrical Life:10,000 Cycles

SCALE	1:1		UNIT: mm
APVD		DATE	2017-5-22
CKD	单世佳	DWN	徐耀飞
SPECIFICATION NO.	ZF-ZRS-		
DESCRIPTION	TOGGLE SWITCH		
MODEL NO.	DTS-102-F1-TO		
PART No.	DPDT3P		
LONGCHUANG ZHONGYE (HK)CO.,LIMITED			