

REV.	DESCRIPTION	APPD	DATE

注意:

1 材质

- 1.1 主体: LCP 黑色
1.2 端子: 铜合金
1.3 外壳: 不锈钢


2 电镀

- 2.1 端子: 镍底60 U"镀金GOLDFLASH

技术参数

- 1 接触电阻 50mΩ MAX
2 绝缘阻抗 1000 MΩ
3 额定电流 1A
4 额定电压 30V MAX
5 使用温度 -30° C ~ 75° C

C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	IO

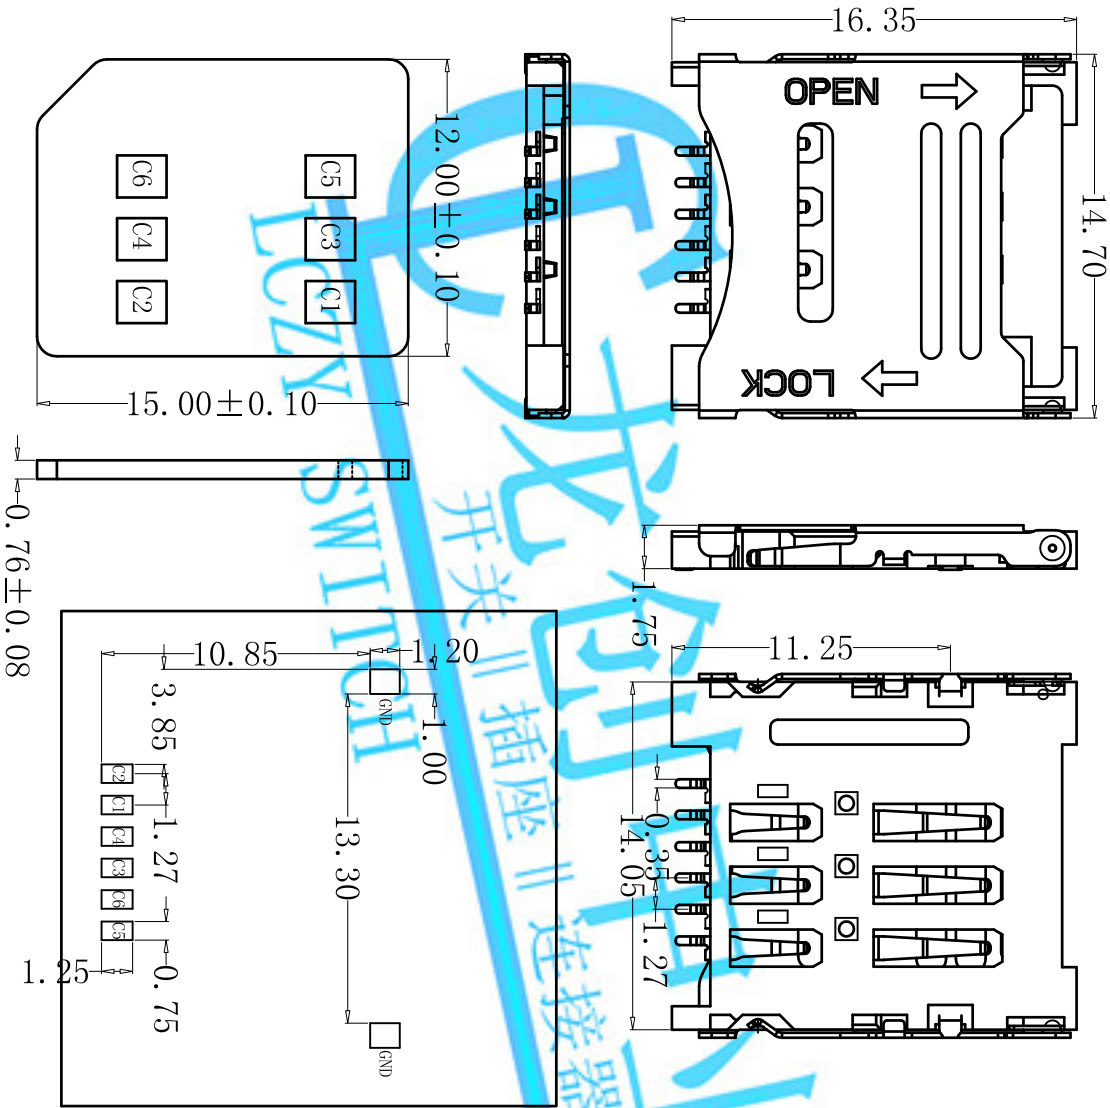

PART NO:	MATERIAL:
LOT NO:	FINISH:
UNIT: MM	SIZE: A4
COLOR:	TITLE:
DR: 刘静 2017/05/23	MICRO SIM (掀盖式)
CHK:	DWG NO:
APP:	SCALE: 1:1
TOLERANCES: GENERAL X.X=±0.35 X.XX=±0.25 X.XXX=±0.15	ANGLE: X.X=±3.0° X.XX=±2.0°
REV: C/0	SHEET: 1 OF 1

LONGCHUANG ZHONGYE (HK)CO.,LIMITED