

REV.	DESCRIPTION	APPD	DATE

NOTES:



1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.


2.PLATING:

UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

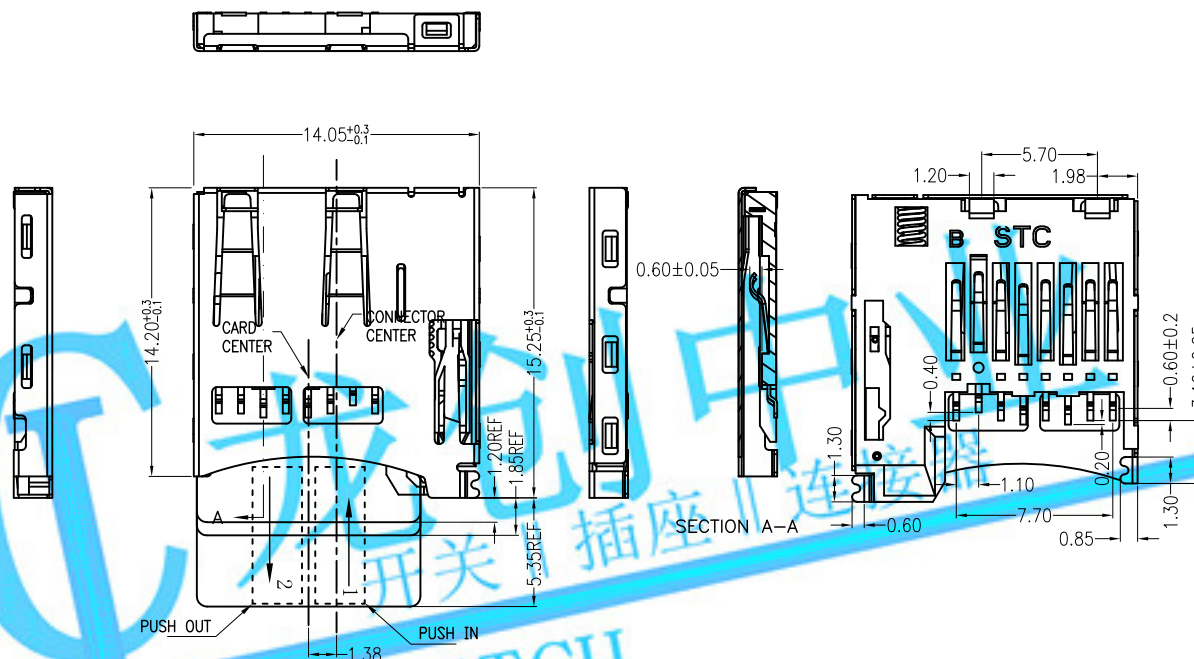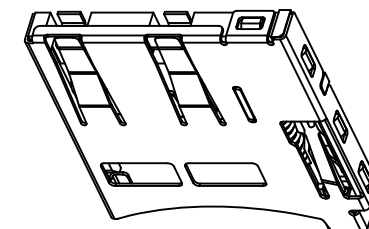


SWITCH

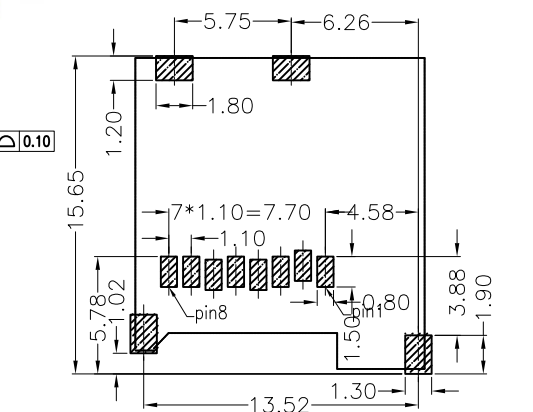

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)



PART NO: TFNF2-EBS1-1111		MATERIAL:		LONGCHUANG ZHONGYE (HK)CO.,LIMITED	
MODEL NO:		FINSH:			
UNIT: MM	SIZE: A4	COLOR:		TITLE: T-FLASH内焊 PUSH B Type	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		DR: 杨凯 0416' 10			
GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		CHK:		DWG NO: FP-100098	
APP:		SCALE: 1:1		REV: B/1	
				SHEET: 1 OF 2	
					