
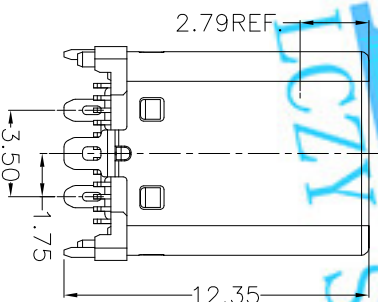
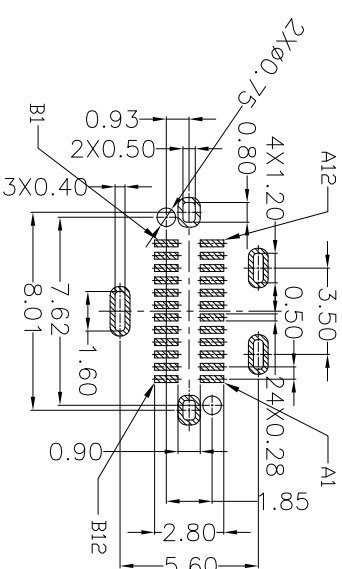
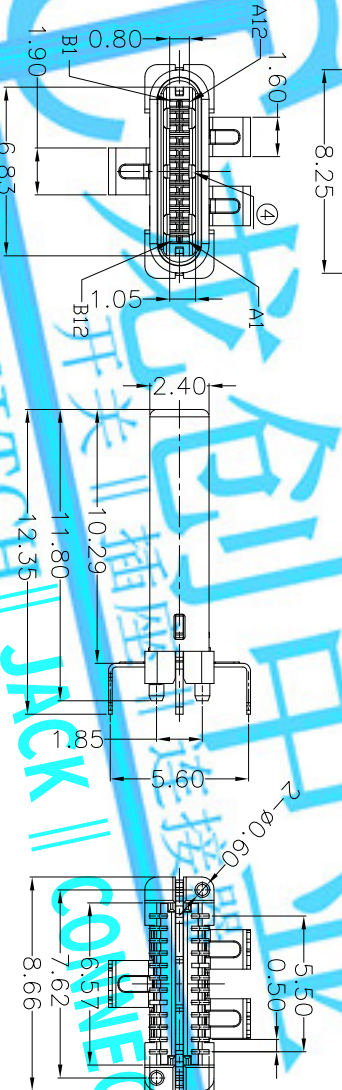
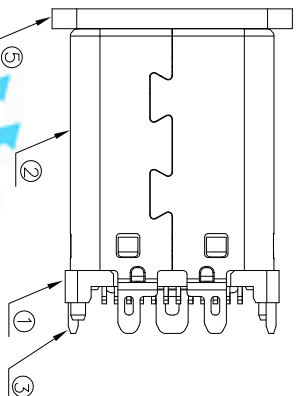


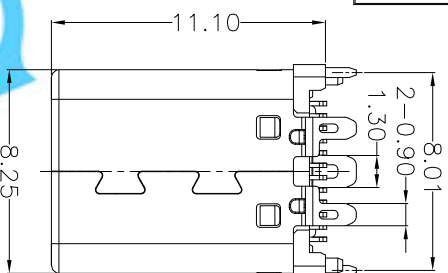

A1	GND	B12	GND
A2	SSTXP1	B11	SSRP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
1. ELECTRICAL:
 - 1) CURRENT RATING: 3AMP MAX;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 40mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +85°C
 2. Mechanical:
 - 1) Mating Force: 5N~20N
 - 2) Umating Force: 8N~20N
 - 3) Durability: 10,000 cycles
 3. DIMENSIONS MARKED "▲"
- TO BE CHECKED BY Q/C & IPQC

USCM-24*IN-4BQ520

[illegible]