
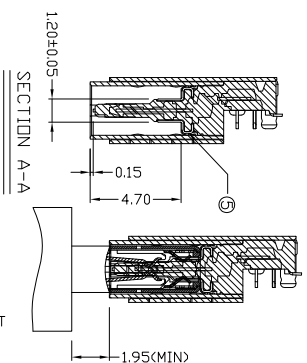


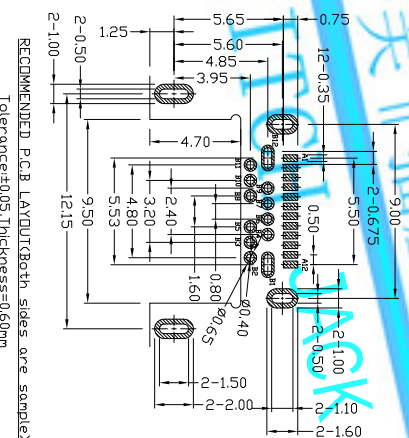
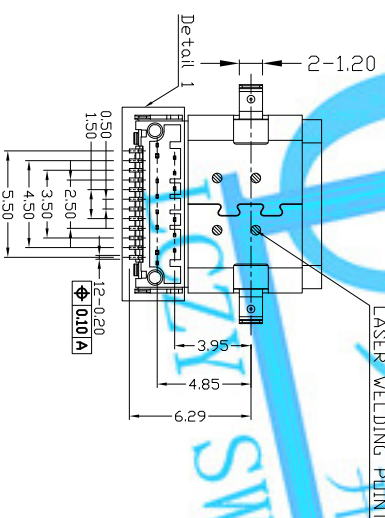


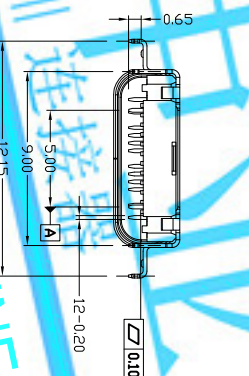



Pin	Signal	Mating	Pin	Signal	Mating
A1	None	Sequence	B12	None	Sequence
A2	SSM ₁	Second	B11	SSM ₁	Second
A3	SSM ₁	Second	B10	SSM ₁	Second
A4	V _{SS}	First	B9	V _{SS}	First
A5	Q1	Second	B8	SR2	Second
A6	D ₁	Second	B7	D ₂	Second
A7	B ₁	Second	B6	D ₂	Second
A8	SR1	Second	B5	Q2	Second
A9	First	First	B4	V _{SS}	First
A10	SSM ₂	Second	B3	SSM ₂	Second
A11	SSM ₂	Second	B2	SSM ₂	Second
A12	QND	First	B1	QND	First
SHELL	QND		SHELL	QND	



NOTES:
1)ELECTRICAL:
1>CURRENT RATING: 5A<V BUS PIN 1.5A/PIN,
SAGND PIN 1.25A/PIN MAX,0.25A/PIN<OTHER PIN>
2>INSULATION RESISTANCE: 100MΩ MIN 250V DC,
3>CONTACT RESISTANCE: INITIAL 40mΩ MAX;
AFTER 50mΩ MAX;
4>WITHSTANDING VOLTAGE: 100V AC MIN;
5>OPERATING TEMPERATURE:-40°C TD +80°C.
2)Mechanical:
1>Mating Force: 5N~20N MAX.
2>Umating Force: 8N~20N(INITIAL)
6N~20N(AFTER 10000 CYCLES) MIN.
3>Durability: 10,000 MATING CYCLES;
3DIMENSIONS MARKED "▲"
TO BE CHECKED BY Q.C. & IPQC.

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO.:		USCF-24SN-5BV J40					
USB 3.1 CF CONNECTOR CL=0.30 沉板 L 40mm DIP TYPE									
DR: <i>Rocky</i> 2018/11/16				DWG NO.:					
CHKD: <i>Rocky</i> 2018/11/16				A11-V-J40					
APPD:				SCALE SHEET		REV.		CUSTOMER DRAWING	
				1:1		1/1		B	
									
UNITS mm									
MAT'L									
SEE NOTE									
FINISH									
SEE NOTE									
X: ±0.35		X': ±2'							
X ±0.30		X' ±1"							
.XX ±0.25		.XX'							
.XXX ±0.15		.XXX'							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDUSTRIES INC.									
ND	PARTS	MATERIAL	QTY	FINISHING					
1	HOUSING	PA46+30%GF	1	UL94V-0					
2	TERMINAL-A	COPPER ALLOY	12	PLATED GOLD					
3	TERMINAL-B	COPPER ALLOY	12	PLATED GOLD					
4	MID PLATE	STAINLESS STEEL	1	PLATED GOLD					
5	GND PLATE	STAINLESS STEEL	1	PLATED NICKEL					
6	SHELL-1	STAINLESS STEEL	1	PLATED NICKEL					
7	SHELL-2	STAINLESS STEEL	1	PLATED NICKEL					