

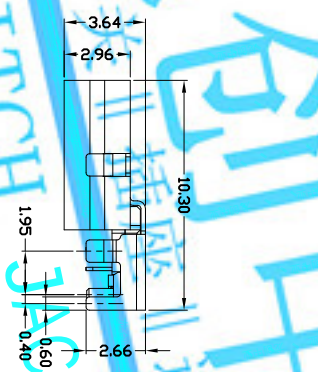
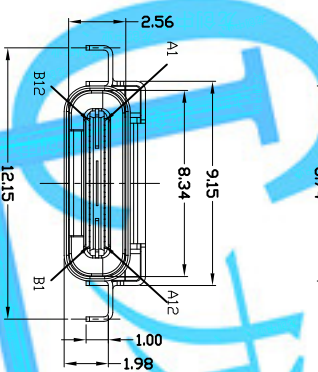


ASSEMBLY DRAWING


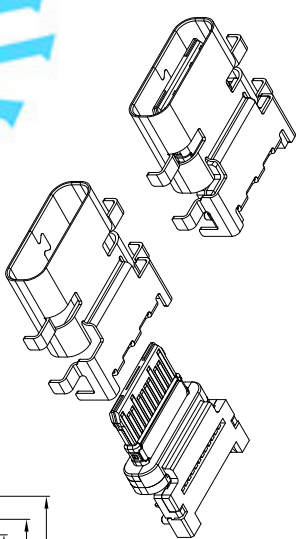


PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTxp1	B11	SSRxp1
A3	SSTxm1	B10	SSRxm1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRxm2	B3	SSTxm2
A11	SSRxp2	B2	SSTxp2
A12	GND	B1	GND

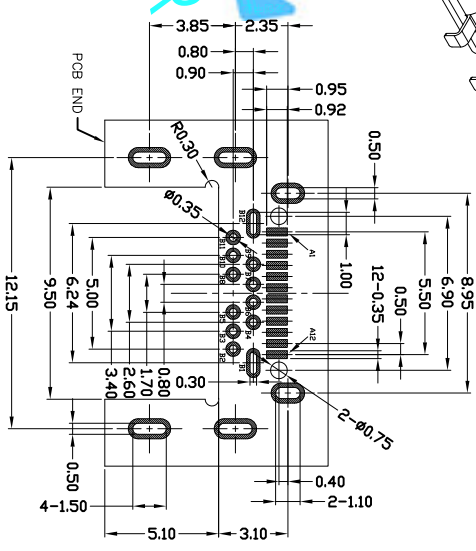

PCB LAYOUT (RECOMMENDED)

(TOL±0.05)

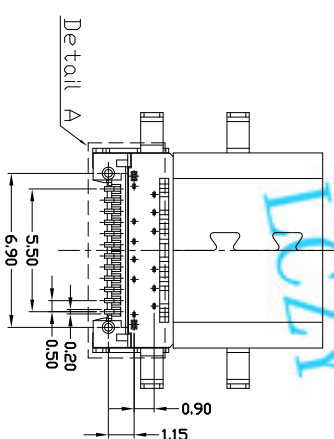


Detail A

Bill of materials:

- NOTES:
- ELECTRICAL:
 - CURRENT RATING:1.5AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-30℃ TD +80℃.
 - Mechanical:
 - Mating Force: 5~20N MAX.
 - Unmating Force: 8~20N MIN.
 - Durability: 10000 cycles MIN.
 - DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.
4. PART NO.

USCF-241N-4BVH01



LONGCHUANG ZHONGYE (HK)CO.,LIMITED												
					UNITS							
					mm							
					MAT'L							
					SEE NOTE							
					FINISH							
					SEE NOTE							
					DR:							
					CHKD:							
					APPD:							
					DWG NO.:							
					SCALE							
					SHEET							
					REV.							
					CUSTOMER							
					DRAWING							
1	SHRAPNEL	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.35	X: ±1°						
4	HOOK	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX°						
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL/TIN	.XXX ±0.15	.XXX°						
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN								
1	HOUSING	SYNTHETIC RESIN LCP+30%GF	1	UL94V-0								
ND	PARTS	MATERIAL	QTY	FINISHING								

LONGCHUANG ZHONGYE (HK)CO.,LIMITED