


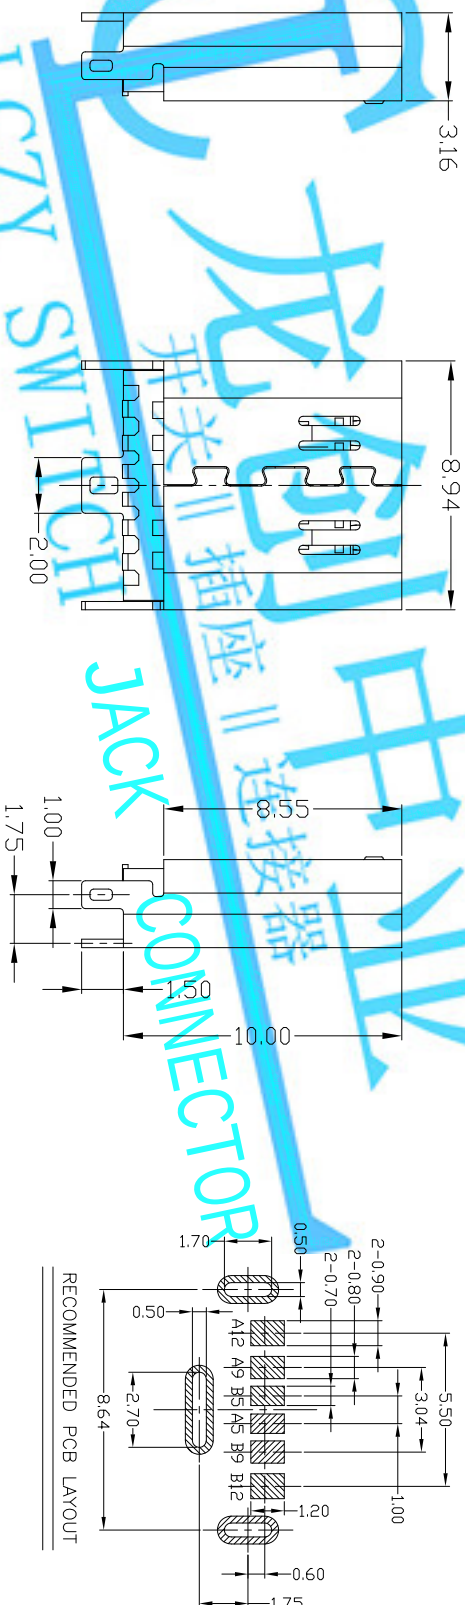


PIN NUMBER	PIN Name	Description
A5	CC1	Configuration Channel
A9	VBIS	Bus Power
A12	GND	Ground return
B5	CC1	Configuration Channel
B9	VBIS	Bus Power
B12	GND	Ground return



- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING:0.5AMP,30V DC,
 - 2) INSULATION RESISTANCE: 100MΩMIN;
 - 3) CONTACT RESISTANCE: 50mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-40°C TD +85°C
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
 3. DIMENSIONS MARKED "▲" TD BE CHECKED BY QJC & IPQC.



LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
		UNITS		mm					
		X. ±0.35		X. ±2°		MAT'L			
3	SHELL	STAILESS STELL		1		PLATED NICKEL		SEE NOTE	
2	TERMINAL	COPPER ALLOY		6		PLATED GOLD/TIN		FINISH	
1	HOUSING	LCP+30%GF		1		UL94V-0		DR: 2018/1/20	
NO	PARTS	MATERIAL		QTY		FINISHING		DWG NO.: A11-Q1T00	
								SCALE SHEET REV.	
								1:1 1/1 B	
								CUSTOMER DRAWING	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.									
USB 3.1 C TYPE 6PIN母头 立式SMT									
TITLE: PART NO.: USCF-06*1N-4BQ100									
CHKD: 2018/1/20									
APPD: 2018/1/20									