

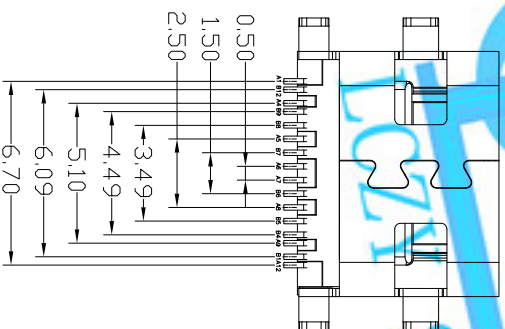
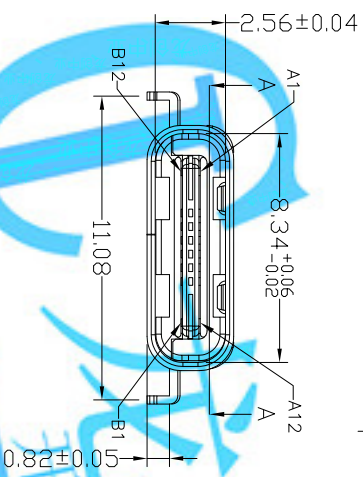


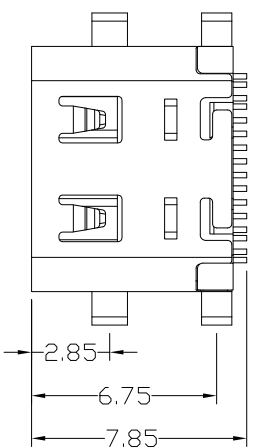

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
1. ELECTRICAL:
 - 1) CURRENT RATING: 3AMP MAX;
 - 2) INSULATION RESISTANCE: 100MΩ MIN 250V DC;
 - 3) CONTACT RESISTANCE: 40mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 20N MAX.
 - 2) Umating Force: 6N MIN.
 3. DIMENSIONS MARKED "▲"
TO BE CHECKED BY Q.C & IPQC.

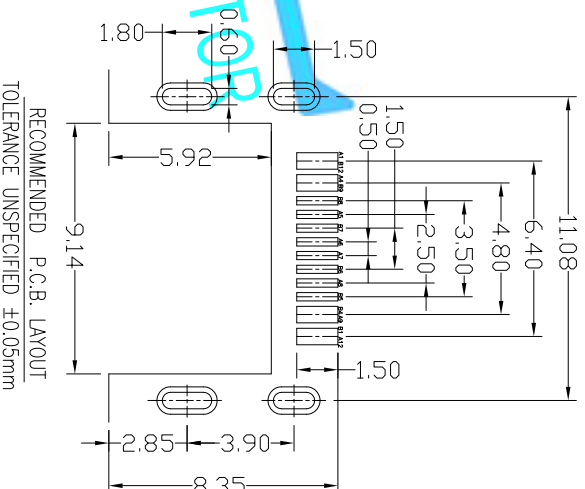

REV.	ECN.	NO.	APPD

LONGCHUANG ZHONGYE (HK)CO.,LIMITED														
5					.X ±0.30	.X' ±1"	UNITS	mm						
4	HOOK	STAINLESS STEEL	1	/	.XX ±0.20	.XX"	MAT'L							
3	SHELL	STAINLESS STEEL	1		PLATED NICKEL	.XXX ±0.10	.XXX"	SEE NOTE						
2	TERMINAL	COPPER ALLOY	16		PLATED GOLD			FINISH						
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED COPIED OR DISSEMINATED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					Q'TY				
ND	PARTS	MATERIAL	QTY	FINISHING							APPD:			
					TITLE: USB TYPE CF 短棒7.35 单拼6P 沉板0.8 有弹					PART NO.: USCF-16XN-4BV67				
					DR: Rocky 2017/12/08					DWG NO.: A11-V67				
					CHKD: Rocky 2017/12/08					SCALE		SHEET	REV.	CUSTOMER DRAWING
										1:1		1/1	B	

LONGCHUANG ZHONGYE (HK) CO., LIMITED

UNITS	mm
MAT'L	
SEE NOTI	

SEE NOTI

FINISH

SEE NOTI

	M
--	---

QTY

--	--
