
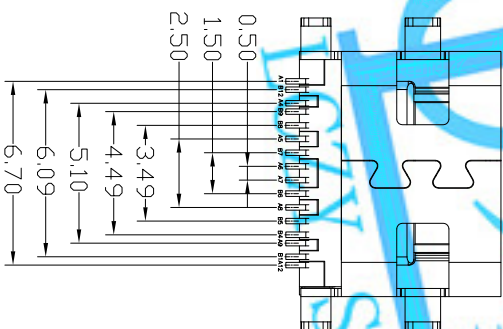
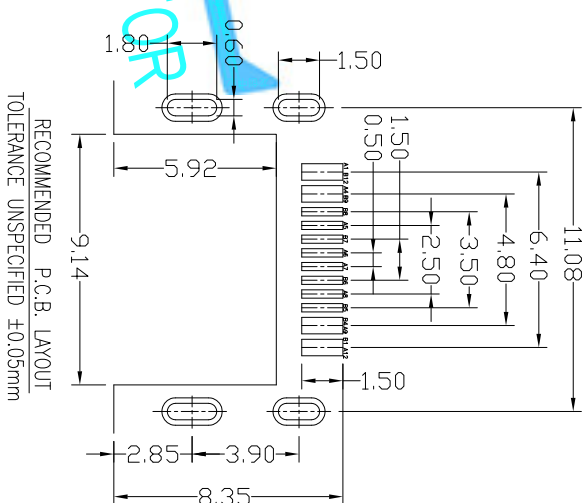

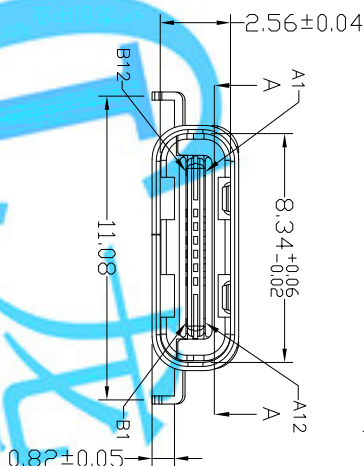


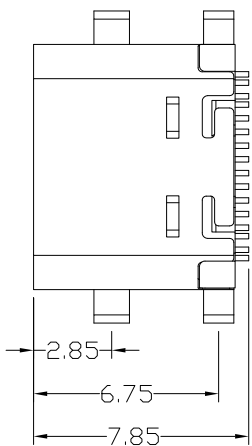

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1. ELECTRICAL:
 - 1) CURRENT RATING: 3AMP MAX;
 - 2) INSULATION RESISTANCE: 100MΩ MIN 250V DC;
 - 3) CONTACT RESISTANCE: 40mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 20N MAX.
 - 2) Umating Force: 6N MIN.
3. DIMENSIONS MARKED "▲"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCF-16*N-4BV68

1:au 1u'
2:au 3u'
5:au 15u'
6:au 30u'

1PBT
2P6T
3P6T
4:CP

W:WHITE
B:BLACK

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO.:							
USB TYPE CF 短棒7.35 单排6P 沉板08 无弹		USCF-16XN-4BV68							
DR: <i>Rocky</i> 2017/12/08		DWG NO.: AII-V68							
CHKD: <i>Rocky</i> 2017/12/08		SCALE SHEET REV. CUSTOMER DRAWING							
APPD:		1:1 1/1 B							
UNITS mm									
MATT'L									
SEE NOTE									
FINISH									
SEE NOTE									
X ±0.30		X' ±1'							
.XX ±0.20		.XX'							
.XXX ±0.10		.XXX'							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
5									
4	HODK	STAINLESS STEEL	1						
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL					
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD					
1	HODUSING	LCP+30%GF	1	UL94V-0					
NO	PARTS	MATERIAL	QTY	FINISHING					

REV.	ECN. NO.	APPD.