

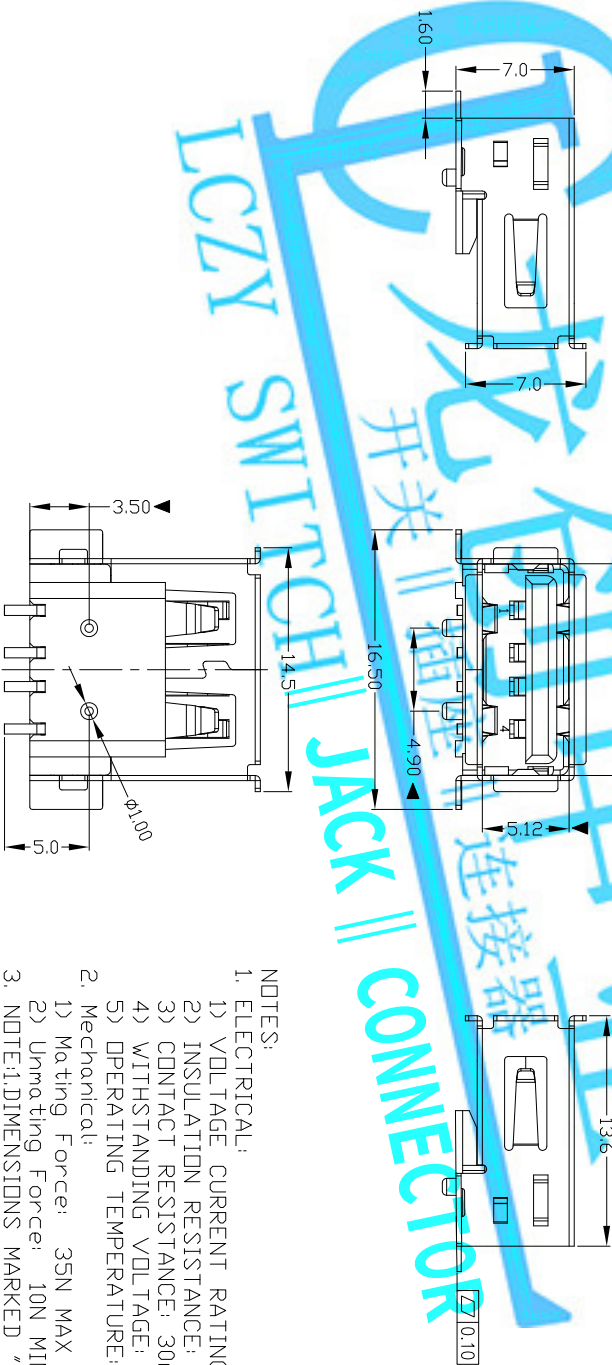


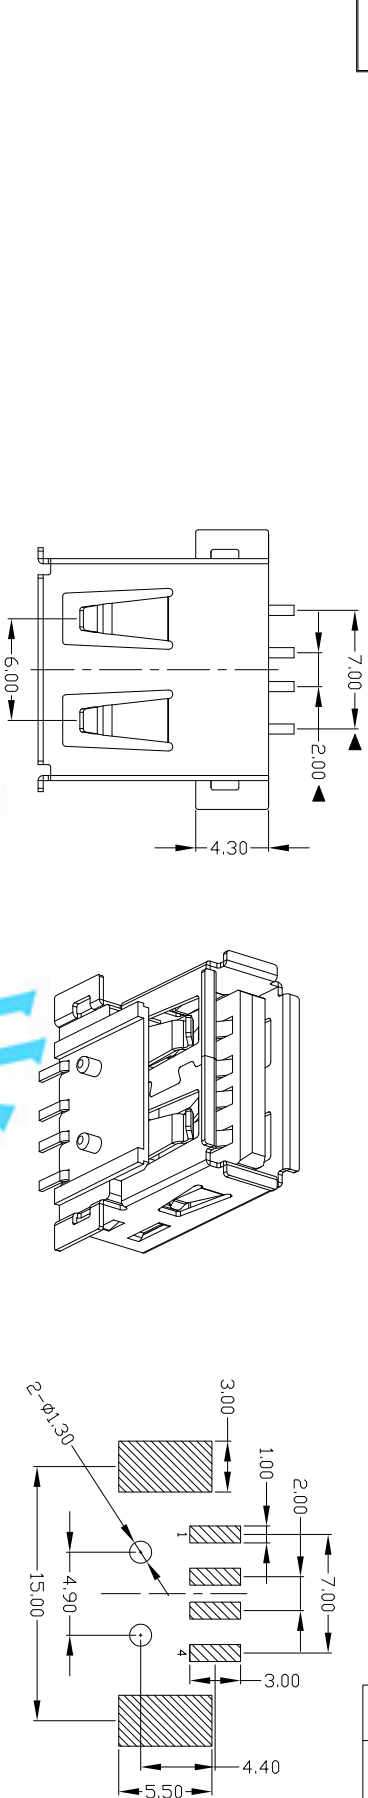

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	mm	TITLE:	USB A/F SMT 全贴片脚	PART NO.:	USAF-04*N-4*V61
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1°	MAT'L		DR:	Rocky 2014/3/26	DWG NO.:	AI1-V61
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX°	SEE NOTE		CHKD:	Rocky 2014/3/26	SCALE	SHEET 1/1
ND	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX°	FINISH		APPD:	Rocky 2014/3/26	REV.	B
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INVENTOR INC.									CUSTOMER DRAWING			

LONGCHUANG ZHONGYE (HK)CO.,LIMITED