




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

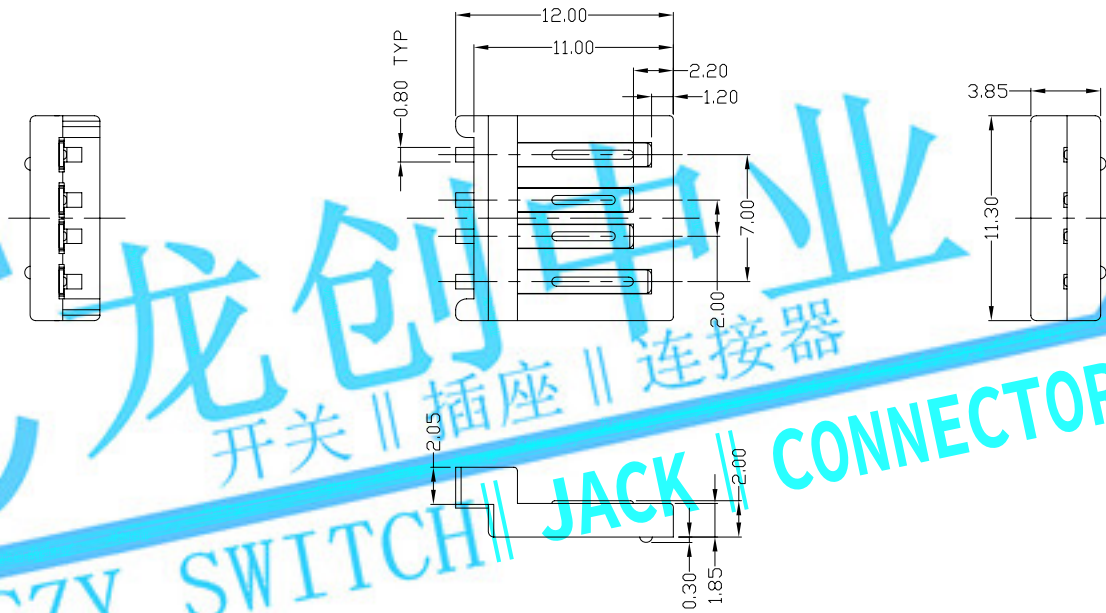

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-04*N-4BV30	
1: Au 1U*	1: PBT
5: Au 15U*	2: PA6T
6: Au 30U*	3: PA9T
	4: LCP
	W: WHITE
	B: BLACK

Bill of materials:

					X. ±0.35	X.* ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
					.X ±0.3	.X.* ±1°	mm							
					.XX ±0.25	.XX*	MAT'L							
2	HOUSING	LCP/PA6T+30%GF	1	UL94V-0	.XXX ±0.15	.XXX*	SEE NOTE	TITLE:		PART NO.:				
								USB AM 180° 贴片式短体(12.0)		USAM-04*N-4BV30				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		FINISH	DR:		DWG NO.:				
							SEE NOTE	gan 2015/11/11		AII-V30				
							Q'TY	CHKD:						
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:		SCALE		SHEET	REV.	CUSTOMER DRAWING
										1:1		1/1	B	