








RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.




MYLAR 示意图



外壳铆合面视图

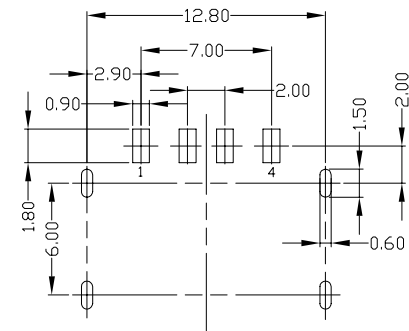

RECOMMENDED PCB LAYOUT



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V66

1: Au 1U²
6: Au 30U²

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X.* ±1°	MAT'L							
					.XX ±0.25	.XX*	SEE NOTE	TITLE: USB A/F 90° SMT短体(10.6) 弹片方形	PART NO.: USAF-04*N-4*V66					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	DR:	gan 2012/6/30		DWG NO.: AII-V66			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	CHKD:	gan 2012/6/30					
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD:	gan 2012/6/30		SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD:			1:1	1/1	B	