





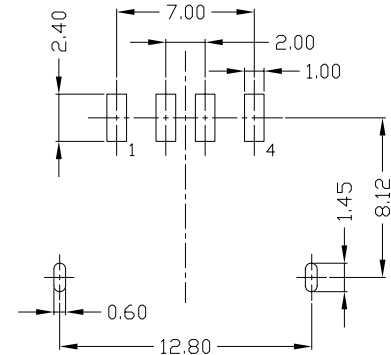


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

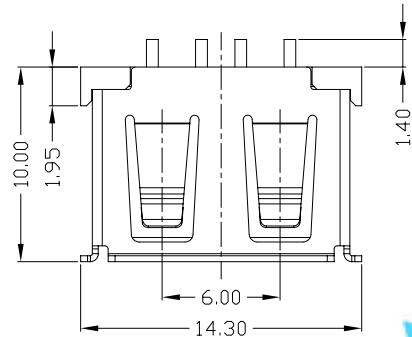

RECOMMENDED PCB LAYOUT

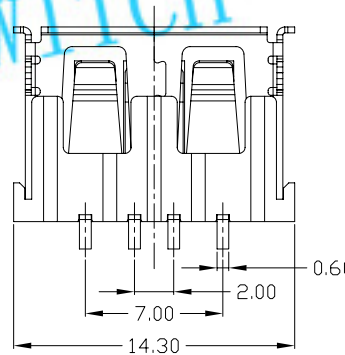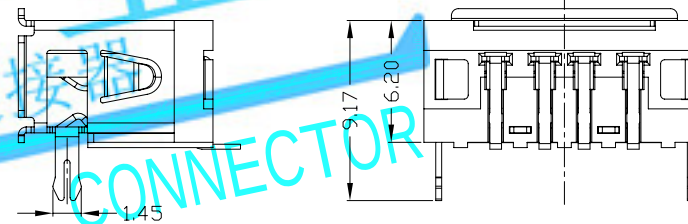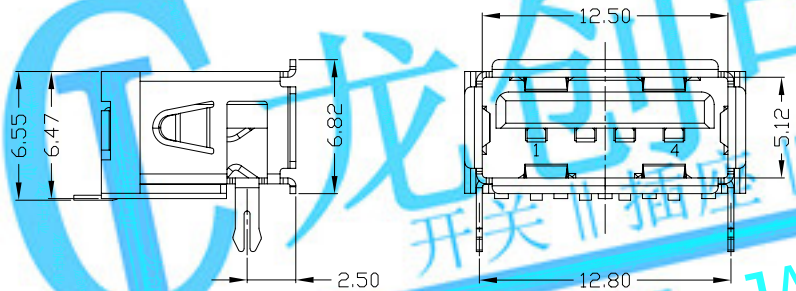

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- INSULATION RESISTANCE: 1000MΩMIN;
- CONTACT RESISTANCE: 30mΩMAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V611

1:1Au 1U*
6:1Au 30U*
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

					X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X.* ±1°	MAT'L	TITLE: USB AF SMT 短体10.0 有卷边			PART NO.: USAF-04*N-4*V611						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE										
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	DR: <i>gan</i> 2016/9/20			DWG NO.: AII-V611						
							SEE NOTE										
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: <i>gan</i> 2016/9/20			SCALE 1:1		SHEET 1/1		REV. B		CUSTOMER DRAWING