

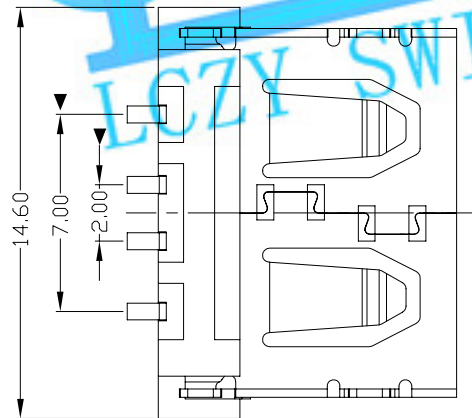
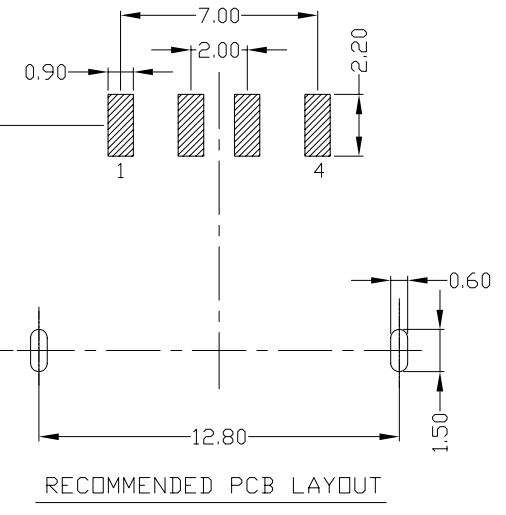


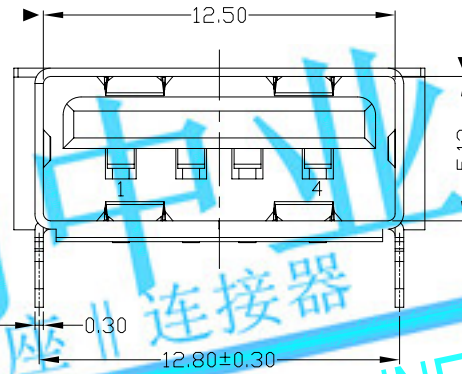

RoHS  
Compliant  
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |

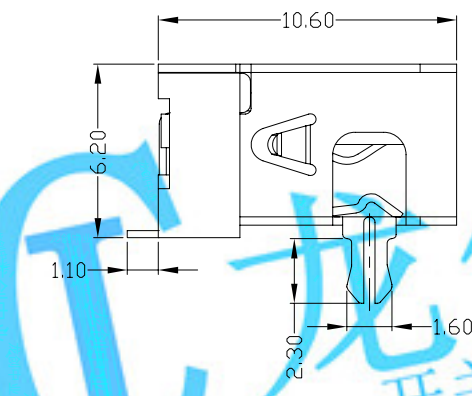

#### NOTES:

##### 1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

##### 2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

##### 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

##### 4. PART NO.

USAF-04\*N-\*\*V803

1: Au 1U"  
6: Au 30U"

W: WHITE  
B: BLACK

1: PBT  
2: PA6T  
3: PA9T  
4: LCP

#### Bill of materials:

|       |          |              |   |                 |            |                              |             |                                                  |  |      |        |                   |
|-------|----------|--------------|---|-----------------|------------|------------------------------|-------------|--------------------------------------------------|--|------|--------|-------------------|
| 3     | HOUSING  | LCP/PBT      | 1 | UL94V-0         | X. ±0.35   | X.* ±2*                      | UNITS<br>mm | LONGCHUANG ZHONGYE (HK)CO.,LIMITED               |  |      |        |                   |
| 2     | SHELL    | COPPER ALLOY | 1 | PLATED NICKEL   | .X ±0.3    | .X.* ±1*                     | MAT'L       | TITLE:<br>USB A/F 90度 SMT 短体2脚<br>鱼叉脚(10.6正向)无卷边 |  |      |        |                   |
|       |          |              |   |                 | SEE NOTE   | PART NO.:<br>USAF-04*N-*V803 |             |                                                  |  |      |        |                   |
|       |          |              |   |                 | .XX ±0.25  |                              |             |                                                  |  | .XX* | FINISH | DR: gan 2012/7/03 |
| 1     | TERMINAL | COPPER ALLOY | 4 | PLATED GOLD/TIN | .XXX ±0.15 | .XXX*                        | SEE NOTE    | DWG NO.:<br>AII-V803                             |  |      |        |                   |
|       |          |              |   |                 | NO         | PARTS                        | MATERIAL    |                                                  |  |      |        | QTY               |
| APPD: |          |              |   |                 |            |                              |             |                                                  |  |      |        |                   |