


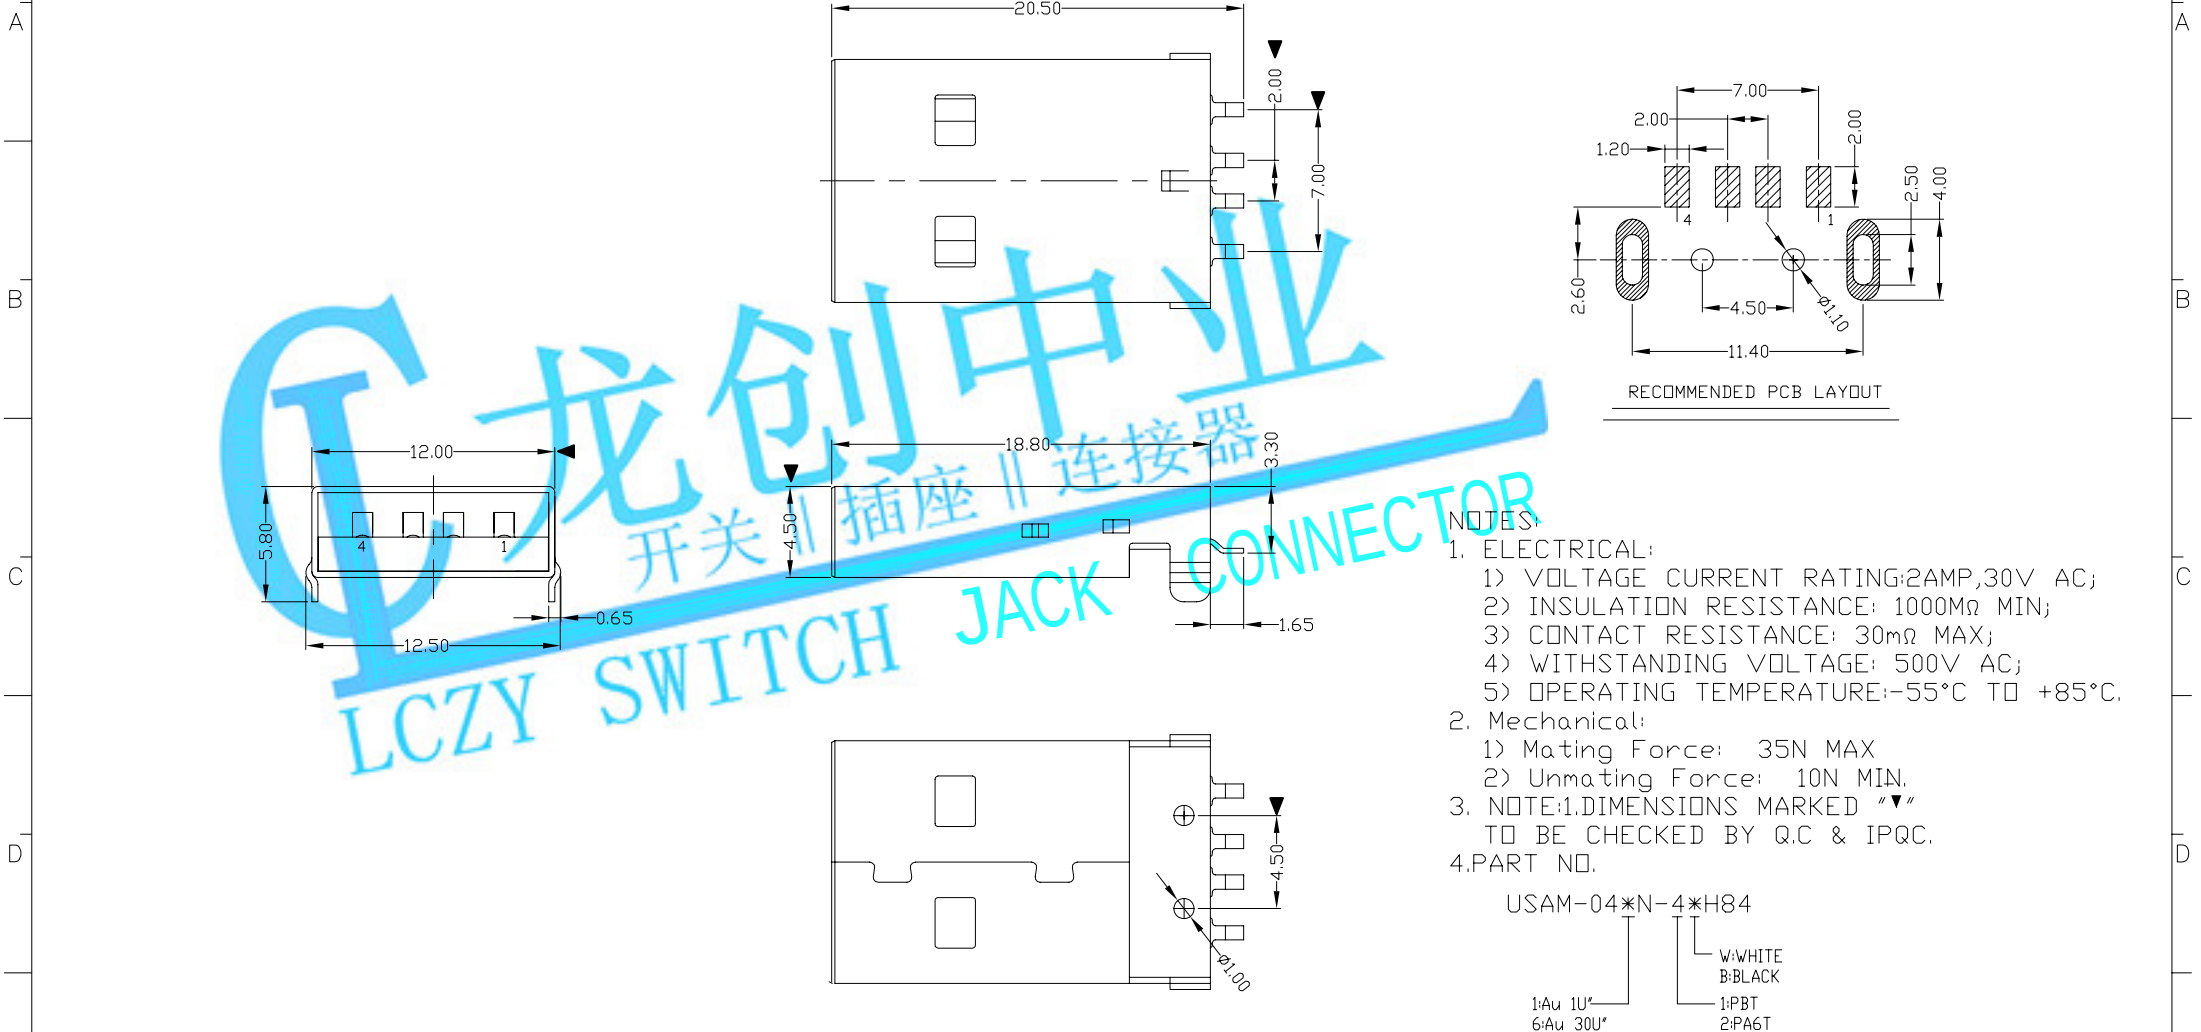

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 - PART NO.


USAM-04*N-4*H84

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1°	MAT'L						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE	FINISH	TITLE:		PART NO.:		
					.XXX ±0.15	.XXX*			USB A/M 90° SMT短体弯脚		USAM-04*N-4*H84		
							THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR:	gan 2012/7/04		DWG NO.:
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD:	gan 2012/7/04		SCALE SHEET REV. CUSTOMER		
								APPD:					
									1:1	1/1	B	DRAWING	