





RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

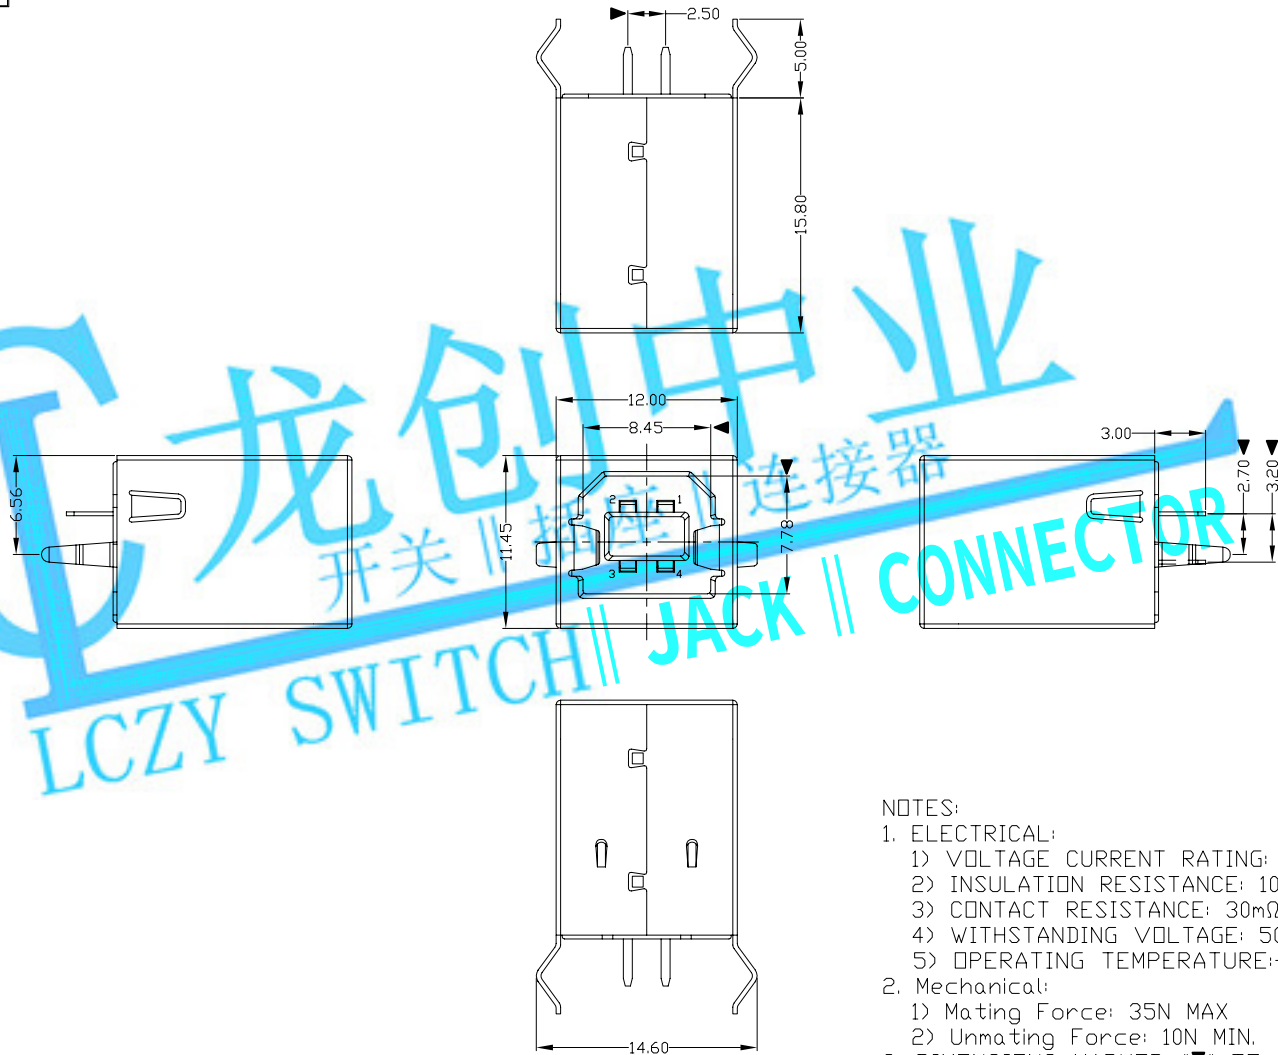

RECOMMENDED PCB LAYOUT

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE
CHECKED BY Q.C & IPQC.

4.PART NO.

USBF-04*N-1*P00

1:AU 1U"
6:AU 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.*	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	BOTTOM COVER	PBT	1	UL94V-0	X. ±0.35	X.* ±2°	mm	TITLE: USB BF DIP 180度 PART NO.: USBF-04*N-1*P00 DR: gan 2012/7/06 DWG NO.: AII-P00 CHKD: gan 2012/7/06 SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING			
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X* ±1°	MAT'L				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX°	SEE NOTE				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.		Q'TY				