



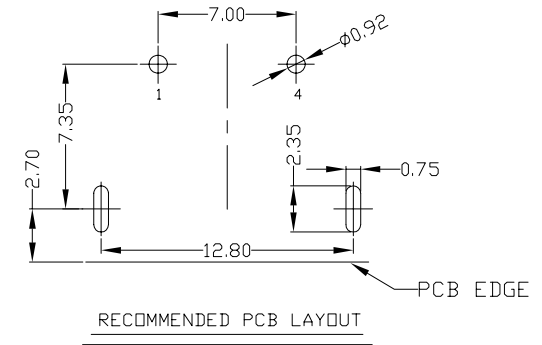
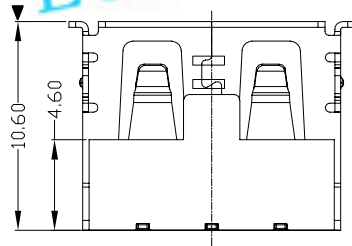


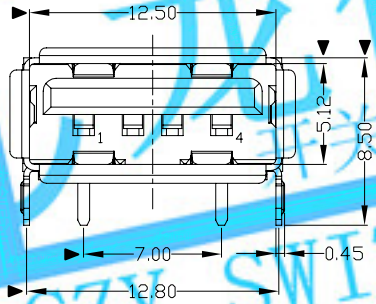

RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R625

1: Au 1U*
6: Au 30U*
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.X ±0.30	.X.* ±1*	MAT'L	TITLE: USB AF DIP 90度 10.6二三短路2P		PART NO.: USAF-04*N-1*R625					
					.XX ±0.25	.XX*	SEE NOTE								
					.XXX ±0.15	.XXX*	FINISH SEE NOTE	DR: <i>gan</i> 2013/5/9		DWG NO.: AII-R625					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: <i>gan</i> 2013/5/9											
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN				APPD:	SCALE 1:1		SHEET 1/1	REV. B	CUSTOMER DRAWING		
NO	PARTS	MATERIAL	QTY	FINISHING											
1		2		3		4		5		6		7			