


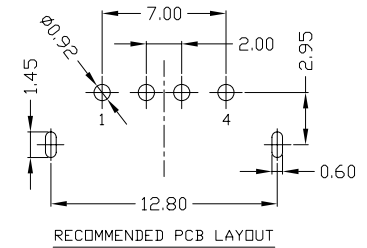


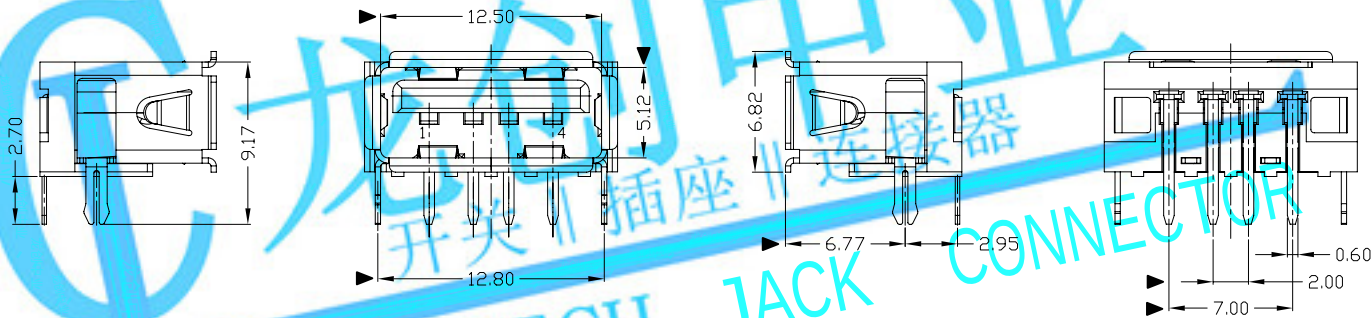

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R630
W: WHITE
B: BLACK
1: 1Au 1U"
6: 1Au 30U"
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

					X. ± 0.35	X.* $\pm 2^{\circ}$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X* $\pm 1^{\circ}$	SEE NOTE	TITLE:		PART NO.:				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*		USB AF DIP 90 脚位 (6.77mm)		USAF-04*N-1*R630				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH	DR:		DWG NO.:				
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	gan 2014/11/18		AII-R630				
							Q'TY	CHKD:		gan 2014/11/18		SCALE	SHEET	REV.
										APPD:		1:1	1/1	B

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.