

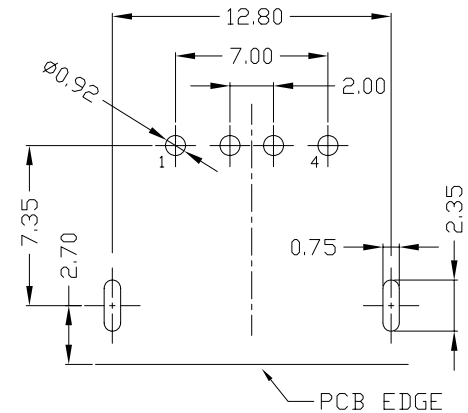
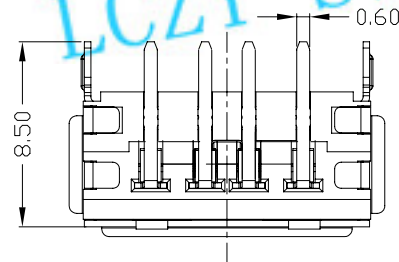


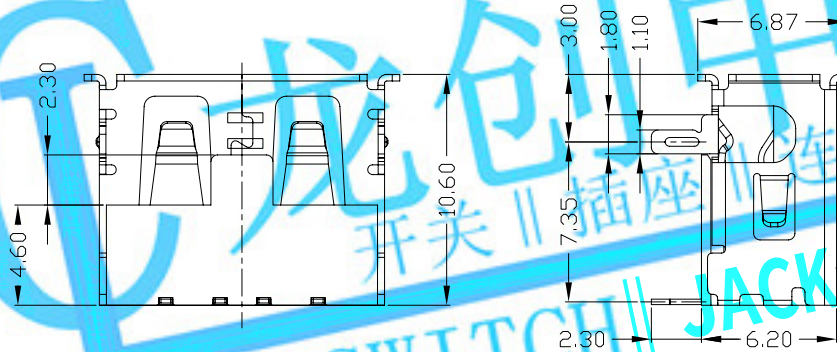

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

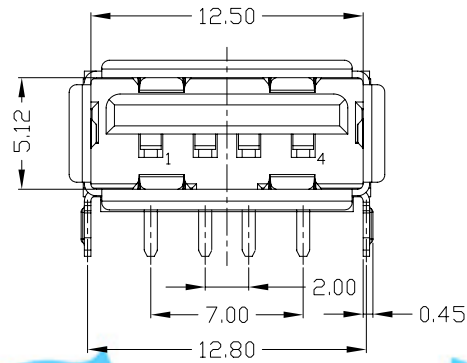

RECOMMENDED PCB LAYOUT

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R635

1: WHITE
2: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

					X. ± 0.35	X.' $\pm 2^{\circ}$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X' $\pm 1^{\circ}$	MAT'L						
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ± 0.25	.XX'	SEE NOTE	TITLE: USB AF 10.6 DIP 90度 厚6.20 卷边 两只前脚		PART NO.: USAF-04*N-1*R635			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX'	FINISH	DR: <i>gan</i> 2016/9/20		DWG NO.: AII-R635			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	SEE NOTE	CHKD: <i>gan</i> 2016/9/20		SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD:		1:1	1/1	B	