
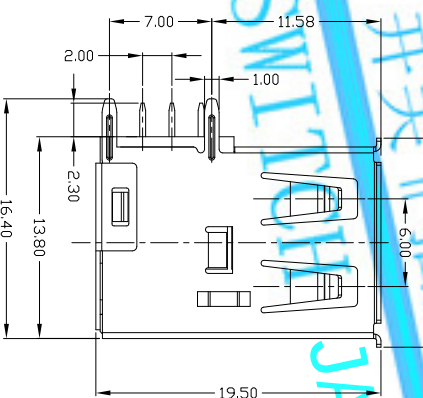
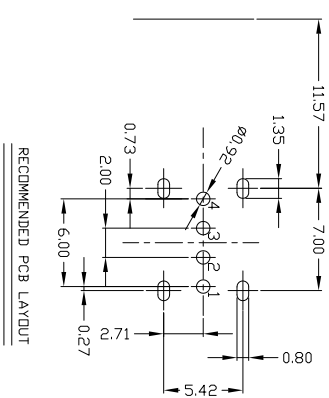







NOTES:
1. ELECO

- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
2) INSULATION RESISTANCE: 1000M Ω /MIN;
3) CONTACT RESISTANCE: 30m Ω MAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-**C33

1: Au 1U*
6: Au 30U*
1: PbT
2: PbT
3: PbT
4: PbT

Bill of materials:

					X. ±0.35	X.* ±2*	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
							mm						
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L	TITLE: USB AP DIP 90度 侧立式长体 反向 卷边有后盖直脚					
					.XX ±0.25	.XX*	SEE NOTE						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH	PART NO.: USAF-04※N-※C33					
							SEE NOTE						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND ARE NOT TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED INC.			Q'TY	DWG NO.: AII-C33				
N/D	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE SHEET REV. CUSTOMER DRAWING				
								1:1 1/1 B					