





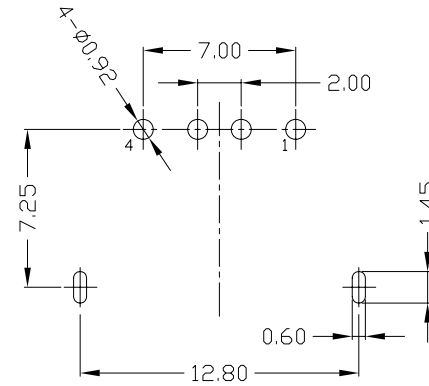


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

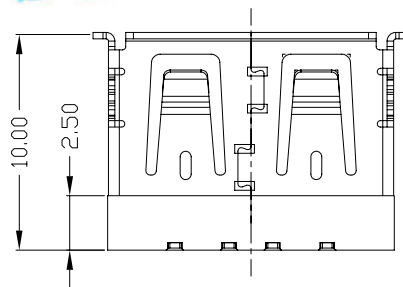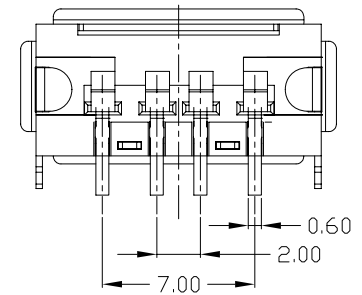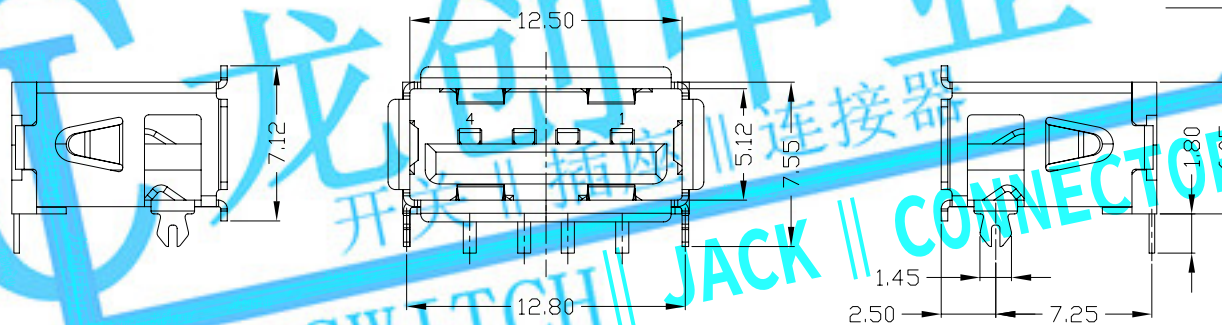

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*R638

1Au 1U*
6Au 30U*
W: WHITE
B: BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

					X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X.* ±1*	MAT'L	TITLE: USB AF DIP 90° 10.0两只脚 反向贴板面缩短			PART NO.: USAF-04*N-4*R638			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE							
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	DR: gan 2016/9/20			DWG NO.: AII-R638			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE							
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD: gan 2016/9/20			SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD:			1:1	1/1	B	