
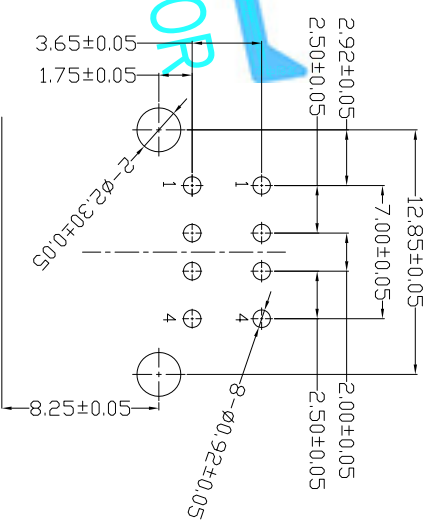


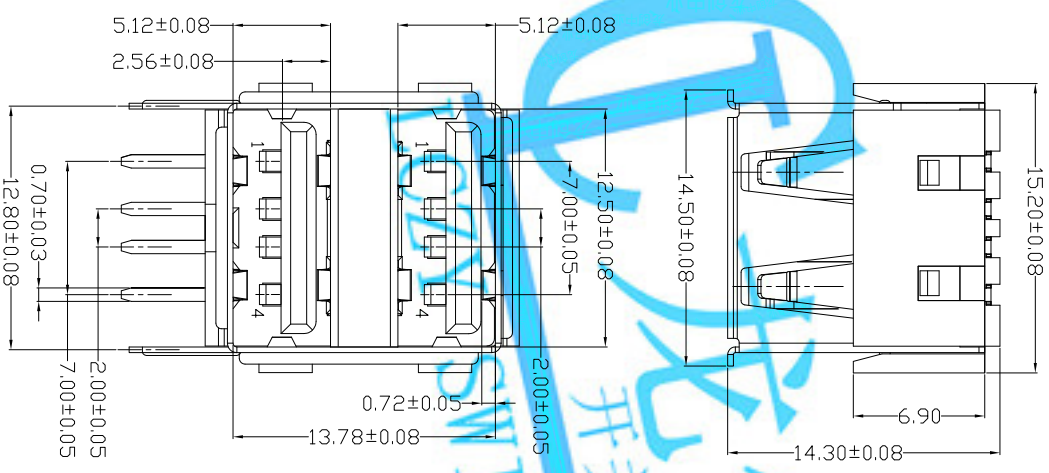

NOTES:

1.ELECTRICAL:

1)VOLTAGE CURRENT RATING:2AMP,30V DC;

2)INSULATION RESISTANCE: 1000MΩ MIN;

3)CONTACT RESISTANCE: 30mΩ MAX;

4)WITHSTANDING VOLTAGE: 500V AC FDR 1MIN;

5)OPERATING TEMPERATURE:-30°C TD +85°C.

2.Mechanical:

1)Mating Force: 35N MAX

2)Umating Force: 10N MIN.

3.DIMENSIONS MARKED "▲" "

TD BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08* N-1XRJ52

1.4u 10" 6.4u 30u"

1PBT 2PAG 3PBT 4LCP

WHITE BBLACK

Bill of materials:

5					X.	±0.15	X.*	±5°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
4					.X	±0.10	.X*	±2°	MAT'L	
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX	±0.05	.XX*	±1°	SEE NOTE	
2	SHELL	COPPER ALLOY / SPCC	1	PLATED NICKEL	.XXX	±0.03	.XXX*	±0.5°	FINISH	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				SEE NDTE	
ND	PARTS	MATERIAL	QTY	FINISHING						
TITLE: USB AF 双层短体90度 正向有卷边										
PART NO.: USAF-08XN-1XRJ52										
DR: Ricky 2019/08/21										
CHKD: Ricky 2019/08/21										
APPD:										
DWG NO.: A11-RJ52										
SCALE SHEET REV. CUSTOMER DRAWING										
1:1 1/1 B										