Pb Process Capable

RoHS Compliant 2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

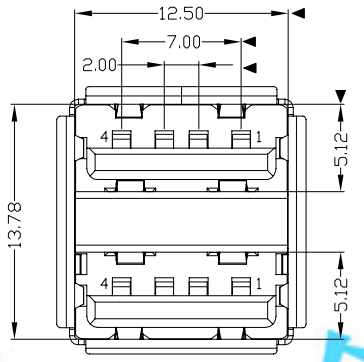



RECOMMENDED PCB LAYOUT



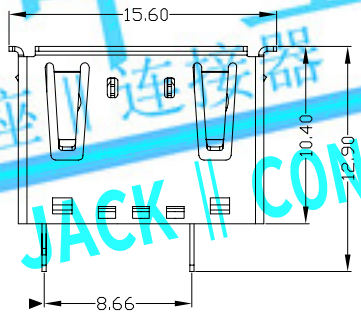





龙创电业 开关‖插座‖连接器 LCZY SWITCH‖ JACK‖ CONNECTOR

NOTES:

1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING:2AMP,30V AC;
   2) INSULATION RESISTANCE: 1000MΩ MIN;
   3) CONTACT RESISTANCE: 30mΩ MAX;
   4) WITHSTANDING VOLTAGE: 500V AC;
   5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-08*N-1*PU01

- 1:Au 1U"
- 6:Au 30U"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	CLIP	SPCC	1	PLATED NICKEL
3	HOUSING	PBT	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN

X. ±0.35	X.° ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
.X ±0.3	.X° ±1°	MAT'L SEE NOTE	TITLE: USB AF 双层180无弹(无脚) 成品 / PART NO.: USAF-08*N-1*PU01
.XX ±0.25	.XX°		DR: gan 2012/7/05 / DWG NO.: AII-PU01
.XXX ±0.15	.XXX°	FINISH SEE NOTE	CHKD: gan 2012/7/05
		Q'TY	APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	