

A

B

C

D

E








A

B

C

D

E

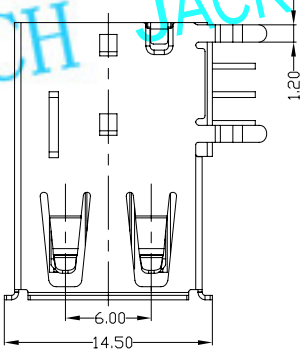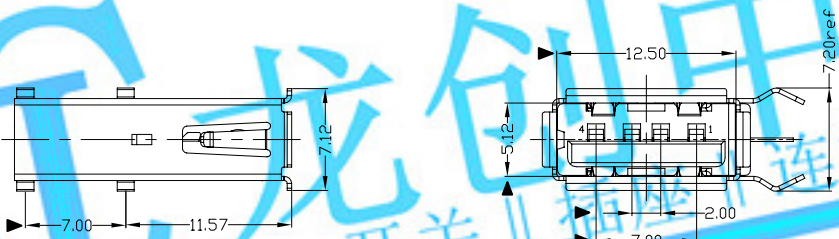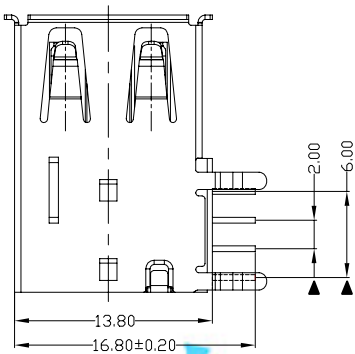

NOTES:

1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*C60

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

5	BACK COVER	SPCC	1	PLATED NICKEL	X. ±0.35	X.* ±2*	UNITS	mm
4	BOTTOM COVER	PBT	1	UL94V-0	.X ±0.30	.X* ±1*	MAT'L	
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX*	SEE NOTE	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
NO	PARTS	MATERIAL	QTY	FINISHING				

LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
TITLE:				PART NO.:			
USB A/F 90° DIP侧插长体				USAF-04*N-1*C60			
DR: gan 2012/6/29				DWG NO.:			
CHKD: gan 2012/6/29				AII-C60			
APPD:				SCALE	SHEET	REV.	CUSTOMER DRAWING
				1:1	1/1	B	