


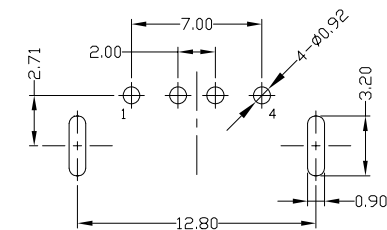
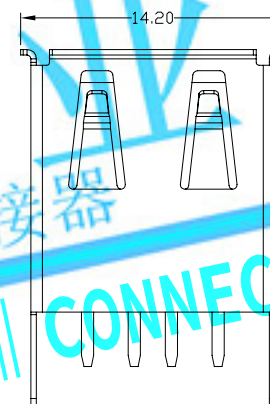


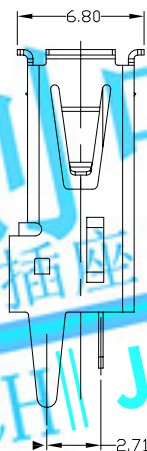

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT



- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

4.PART NO.

USAF-04*N-1*P64

$$\begin{array}{r} 1: \text{Au} \quad 1\text{U}^* - \\ 6: \text{Au} \quad 30\text{U}^* \end{array}$$

— W:WHITE
B:BLACK

— 1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

4	COVER	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE	TITLE: USB A/F 180° DIP 14.1mm 直脚		PART NO.: USAF-04*N-1*P64		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	SEE NOTE	Q'TY	DR: <i>gan</i> 2012/6/29		DWG NO.: AII-P64		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								
								APPD:					