




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

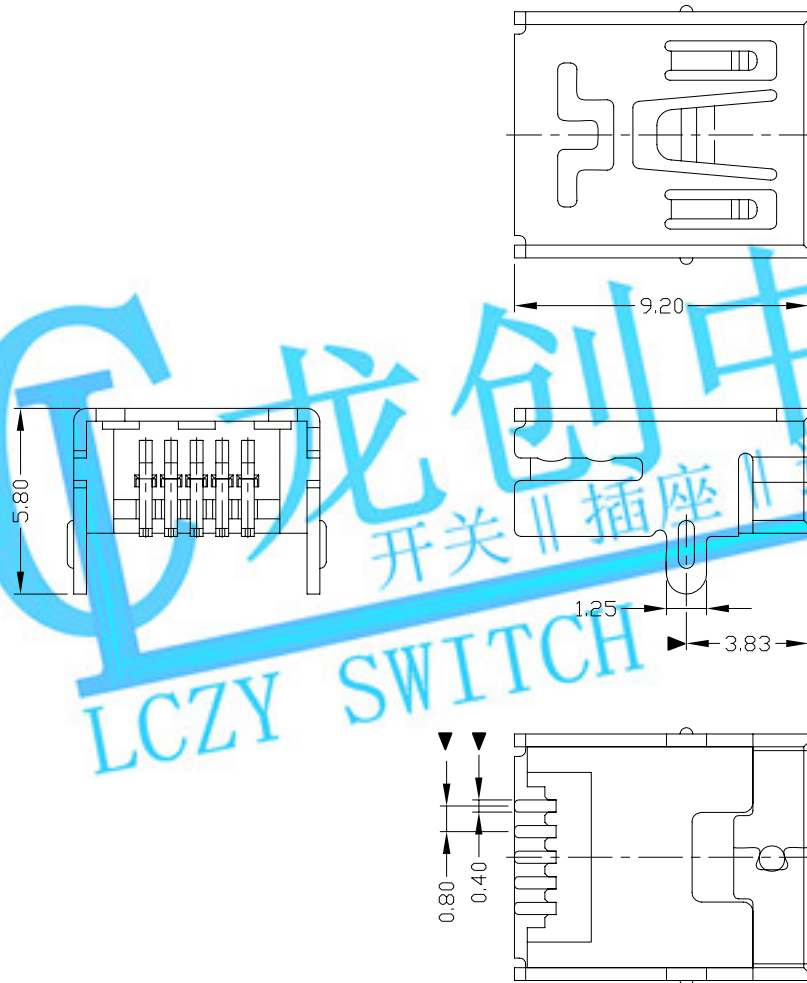


NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100M Ω MIN;
- 3) CONTACT RESISTANCE: 50m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
 - 2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

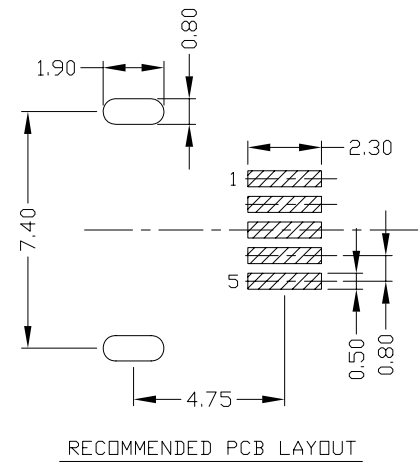

4.PART NO.

MUBF-05*N-4BH88

1:W/WHITE
2:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X. $\pm 2^*$	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
					X. ± 0.3	X. $\pm 1^*$	mm				
3	HOUSING	LCP	1	UL94V-0	.X ± 0.3	.X* $\pm 1^*$	MAT'L	TITLE: MINI USB 5P/F 90° SMT (B型两脚)			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*	SEE NOTE				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH	DR: gan 2012/7/02			
							SEE NOTE				
							Q'TY	CHKD: gan 2012/7/02			
								APPD:			
								SCALE: 1:1			
								SHEET: 1/1			
								REV. B			
								CUSTOMER DRAWING			