
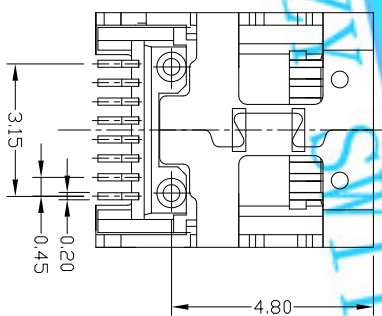
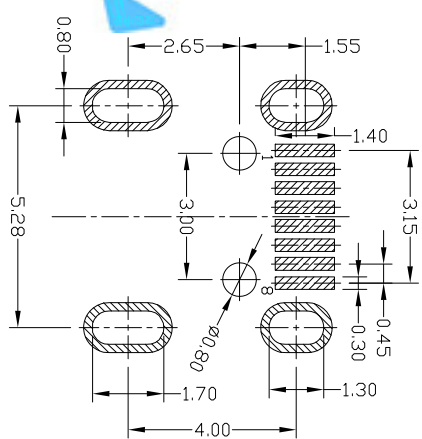
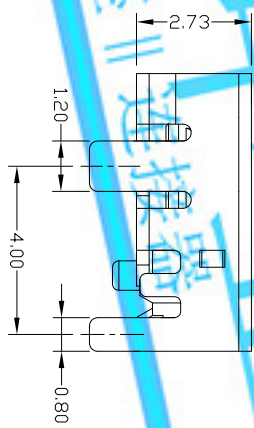



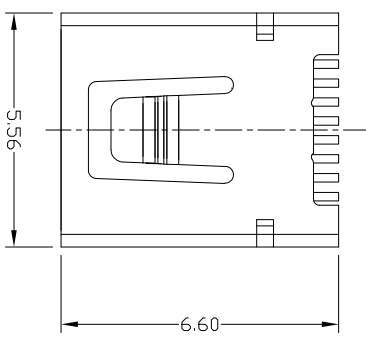

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 1.0AMP, 30V DC;
 - 2) INSULATION RESISTANCE: 100M Ω MIN;
 - 3) CONTACT RESISTANCE: 50m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Unmating Force: 1N MIN.
3. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-08*N-4BV81
1Au 1u"
6Au 30u"
Ni/NICKEL
G/GOLD
W/WHITE
B/BLACK
1PB1
2PA61
3PA91
4LCP

E		LONGCHUANG ZHONGYE (HK)CO.,LIMITED										E		
3	HOUSING	LCP+30%GF	1	UL 94V-0	X. ±0.35	X. ±2°	UNITS	mm	TITLE: MINI USB 8P/F 90° DIP四脚(横插/双边倒角)				PART NO: MUBF-08* N-4BV81	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL/GOLD	X ±0.3	X. ±1°	MAT'L							
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XX ±0.25	.XX°	SEE NOTE							
ND	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX°	FINISH	SEE NOTE	DR:	DWG NO:				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD:	gan 2017/05/03		A11-V81		
										APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
											1:1	1/1	B	