
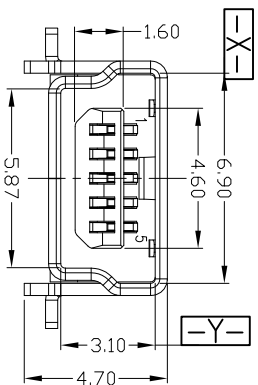
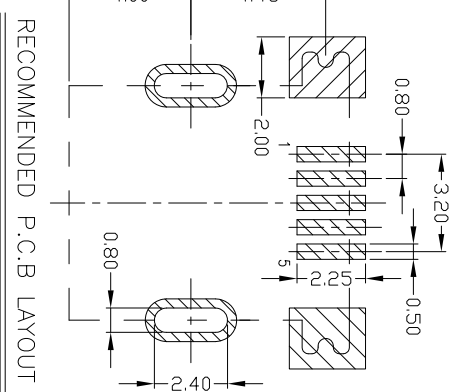
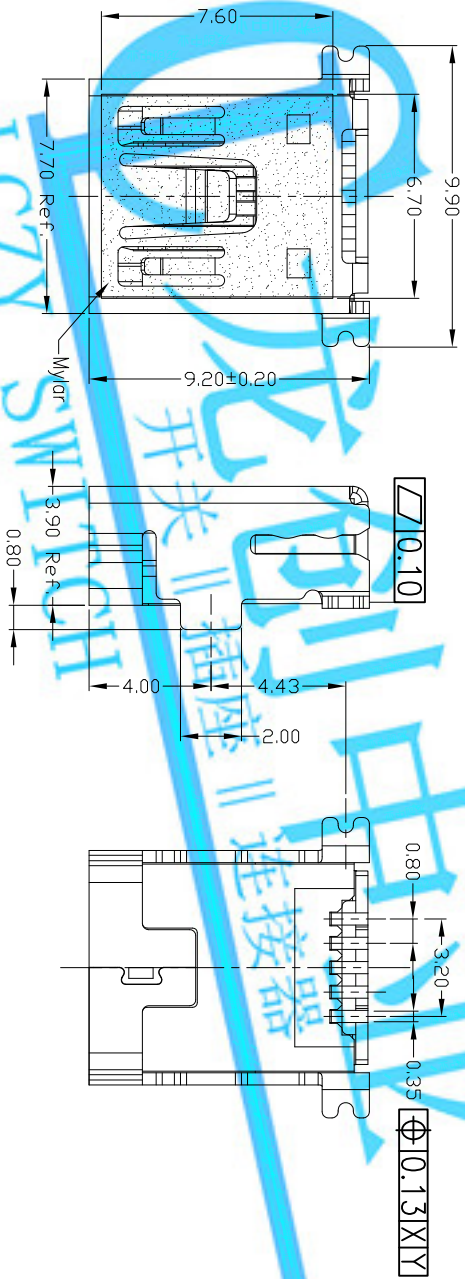



REV	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	-----	-------------	------	---------	------



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 10AMP, 30V AC;
 - INSULATION RESISTANCE: 100M Ω MIN;
 - CONTACT RESISTANCE: 50m Ω MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -25°C TD +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▲" TD BE CHECKED BY Q.C & IPQC.
4. PART NO.
- MUBF-05* N -4BHUA151-M
- 14u 10" WHITE
6Au 30u" BLACK
NICKEL
T1N
1PBT
2PAGT
3PAGT
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
5					.X ± 0.15	Angl'	
4					.XX ± 0.10		
3	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN	.XXX ± 0.05		
2	HOUSING	LCP+30%GF	1	UL94V-0			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			
ND	PARTS	MATERIAL	QTY	FINISHING			