

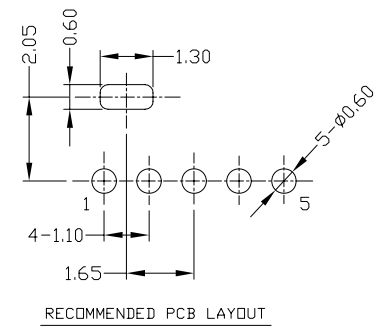


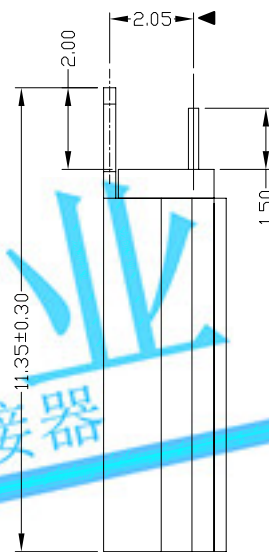


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

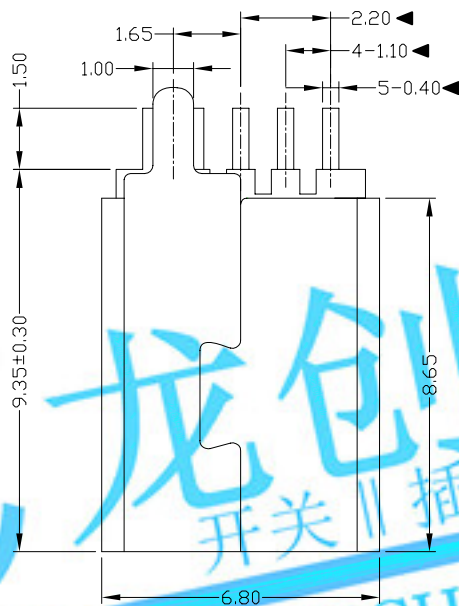

LCZY SWITCH

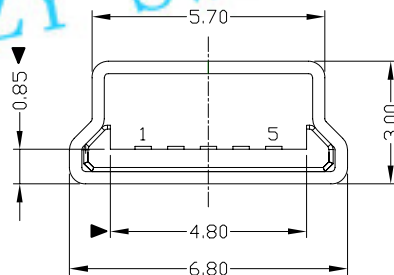

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 1AMP,30V AC;
- INSULATION RESISTANCE: 100MΩ MIN;
- CONTACT RESISTANCE: 50mΩ MAX;
- WITHSTANDING VOLTAGE: 300V AC;
- OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- Mating Force: 30N MAX
- Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBM-05*N-1BP60

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X.* ±1*	MAT'L	SEE NOTE	TITLE: MINI USB BM 5P 一体式单脚		PART NO.: MUBM-05*N-1BP60			
					.XX ±0.25	.XX*	FINISH							
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	SEE NOTE	DR:	gan 2012/07/03		DWG NO.: AII-P60			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					CHKD:				gan 2012/07/03
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	APPD:	SCALE		SHEET	REV.	CUSTOMER DRAWING	
1		2		3		4		5		6		7		