


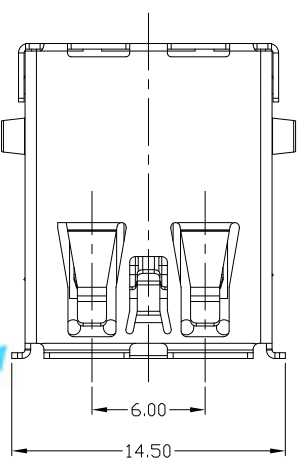


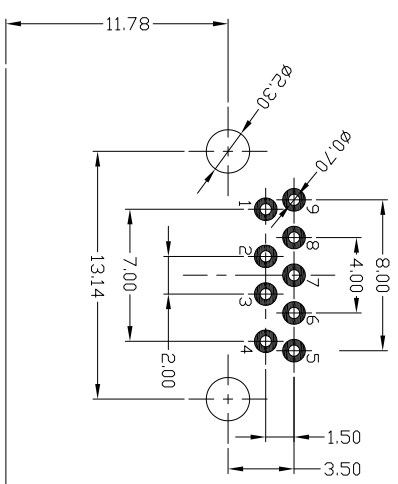

PIN NUMBER	SIGNAL NAME
1	V-BUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

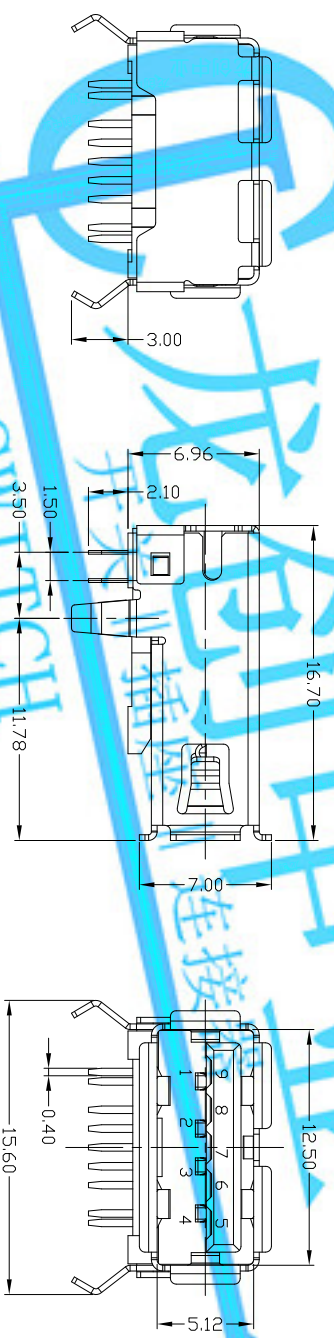

RECOMMENDED PCB LAYOUT

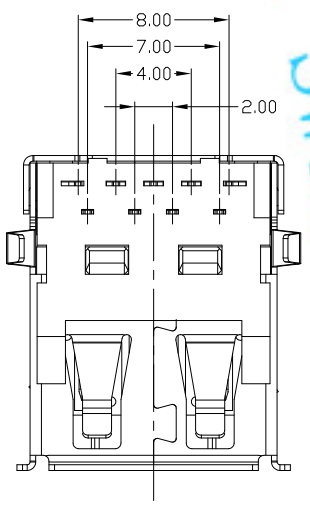

- NOTES:
1. ELECTRICAL:
- 1) CURRENT RATING:1.5AMP;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-40℃ ~ +85℃.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09* N -4BLRC18

11Au 1U' 5Au 15U' 6Au 30U'

W:WHITE
B:BLACK
BL:BLUE

1PBT 2PA6T 3PA9T 4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING
1	HOUSING	LCP+30%GF	1	UL94V-0	QTY		DR: 2016/08/30	USAF-09* N -4BLRC18	1:1	1/1	B	
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	FINISH		DR: 2016/08/30					
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE		DR: 2016/08/30					
4	PARTS	MATERIAL					DR: 2016/08/30					

LONGCHUANG ZHONGYE (HK)CO.,LIMITED