

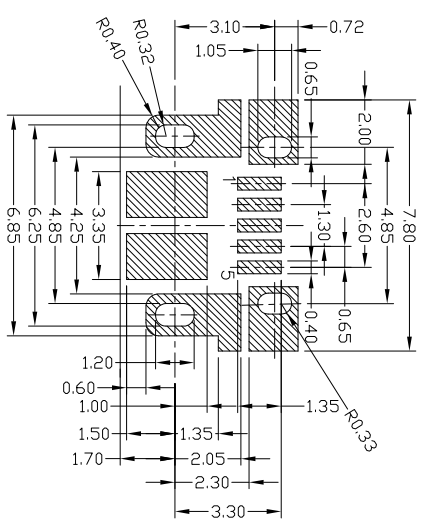







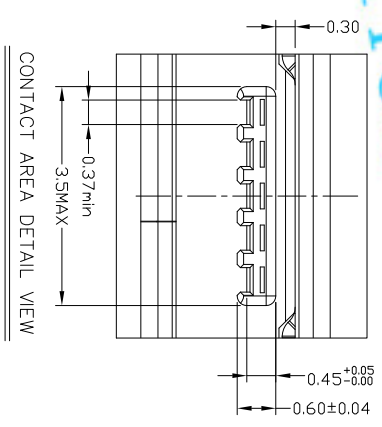


RECOMMENDED PCB PATTERN
Tolerance:±0.05

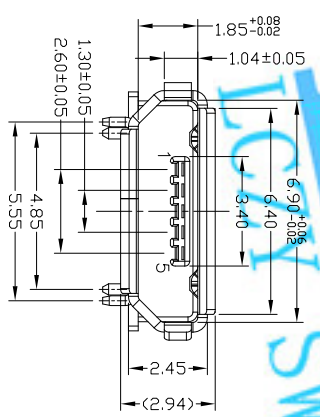

(INSIDE INTERSECTION)

- NOTES:
- 1.ELECTRICAL:
1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX
/ PIN2&3&4 1AMP MAX, 30V AC;
2)INSULATION RESISTANCE: 100MΩ MIN;
3)CONTACT RESISTANCE: 30mΩ MAX;
4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5)OPERATING TEMPERATURE:-30℃ TO +80℃.
 - 2.Mechanical:
1)Mating Force: 35N MAX
2)Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
3	SHELL	STAINLESS STEEL	1	PLATED TIN								
2	HOUSING	LCP+30%GF	1	UL94V-0								
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD								
ND	PARTS	MATERIAL	QTY	FINISHING								