



REV.	DESCRIPTION	APPD	DATE

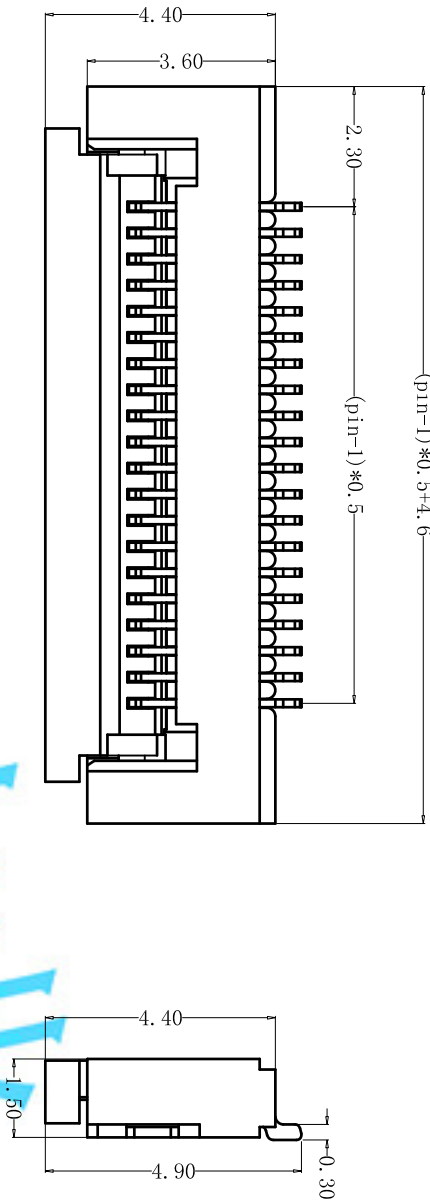


- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
 - 2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: TIN OVER NICKEL.
 - 3.MULTIMEDIA CARD COMPATIBLE

订购需知:

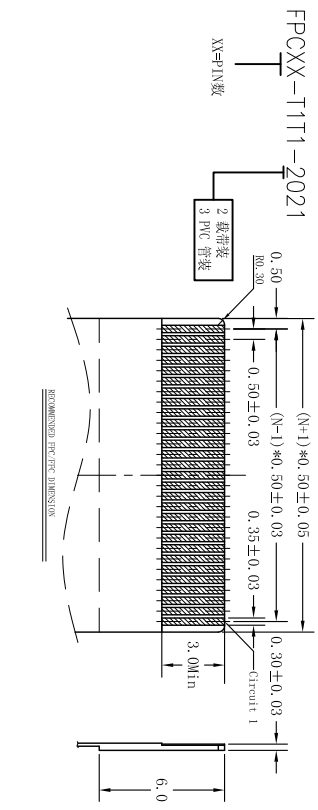

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

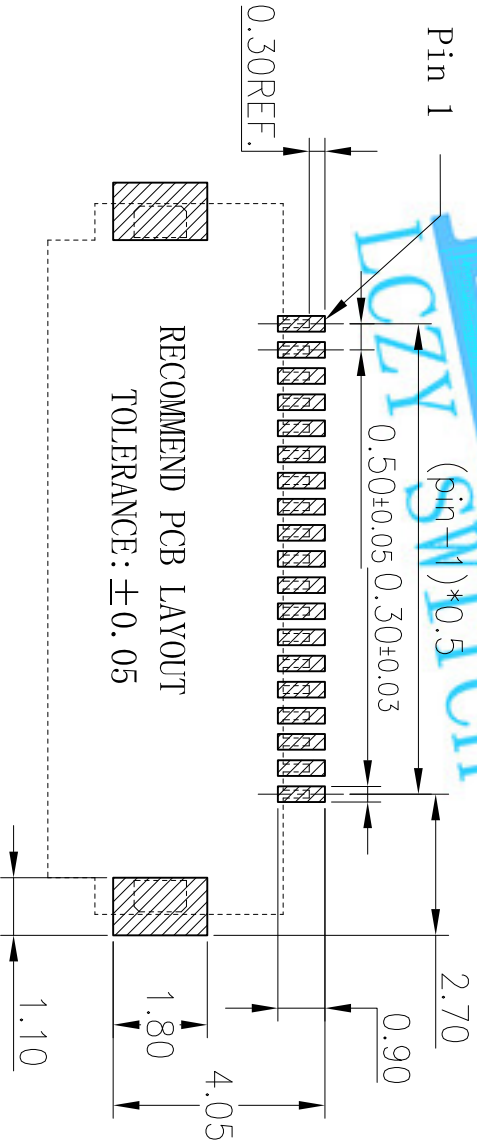

PART NO: FPCXX-T1T1-2021-A		MATERIAL:	
LOT NO:		FINISH:	
UNIT: MM		COLOR:	
SIZE: A4		TITLE:	
DR: 杨凯 2011/03/31		PFC 0.5PH H1.5 前翻	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		CHK:	
GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		DWG NO:	
APP:		SCALE: 1:1	
		SHEET: 1 OF 1	
		REV: C/0	

REV.	DESCRIPTION	APPD	DATE

产品管装数量表:

2.00PCS/箱	管装数量/箱(子数, 零头=1K)
20 PIN	38*25=950 1*825=1000PCS
30 PIN	29*34=986 1*114=1000PCS
40 PIN	23*43=989 1*111=1000PCS
50 PIN	19*52=988 1*112=1000PCS
60 PIN	16*62=992 1*88=1000PCS
1.50PCS/箱	管装数量/箱(子数, 零头=1K)
20 PIN	38*27=997 2*112=1000PCS
30 PIN	27*37=999 1*181=1000PCS
40 PIN	22*43=946 1*10=1000PCS
50 PIN	18*52=936 1*10=1000PCS
60 PIN	14*62=868 2*118=1000PCS
2.00PCS/箱	管装数量/箱(子数, 零头=1K)
20 PIN	40*25=1000PCS
30 PIN	30*33=990 1*10=1000PCS
40 PIN	23*43=989 1*111=1000PCS
50 PIN	19*52=988 1*112=1000PCS
60 PIN	16*62=992 1*88=1000PCS

以上产品管装参数仅供参考,
以实际装产品数量为准。

1. 材质要求:

1.1 纸箱的材质要求为A=A 630*240*140mm

2. 包装要求:

2.1 每1K产品装一小捆, 每小捆中间放一袋干燥剂, 然后小捆上面贴上标签。

2.3 小捆用PE袋包装, 装好后用热封机将PE袋内空气抽掉, 口部热封好。


2.4 纸箱装小捆的数量根据小捆的大小而定。

2.5 把包装好的成品打包封箱, 并在纸箱外贴上标签

备注:

1. 管内若有未装满之零数, 用泡棉塞满, 箱内间隙过大用填充棉填满。

2. 针对于包装方式可根据客户要求包装。

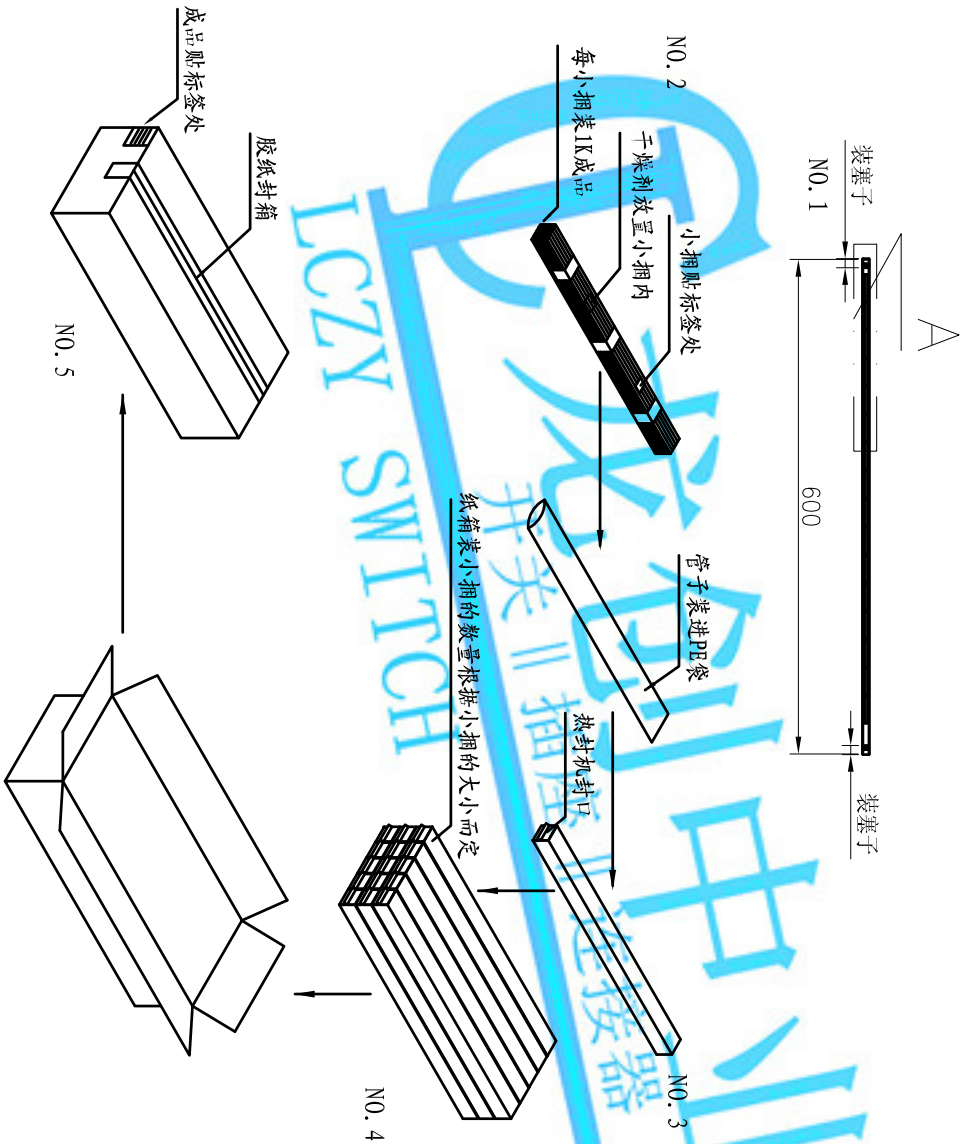

纸箱规格: 630*240*140mm

每小捆装1000PCS产品, 纸箱装小捆的数量根据小捆的大小而定。

PART NO: PFCXX-TT11-XXXX	MATERIAL:	LONGCHUANG ZHONGYE (HK)CO., LIMITED		
LOT NO:	FINSH:			
UNIT: MM	SIZE: A4	COLOR:		
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15	GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°	DR: 伍彪	TITLE: F P C 包装图	
CHK:	DWG NO: FFP-1000064	REV:		
APP:	SCALE: 1:1	SHEET:		

3 OF 3