
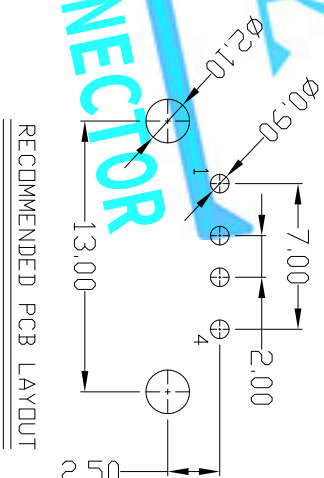


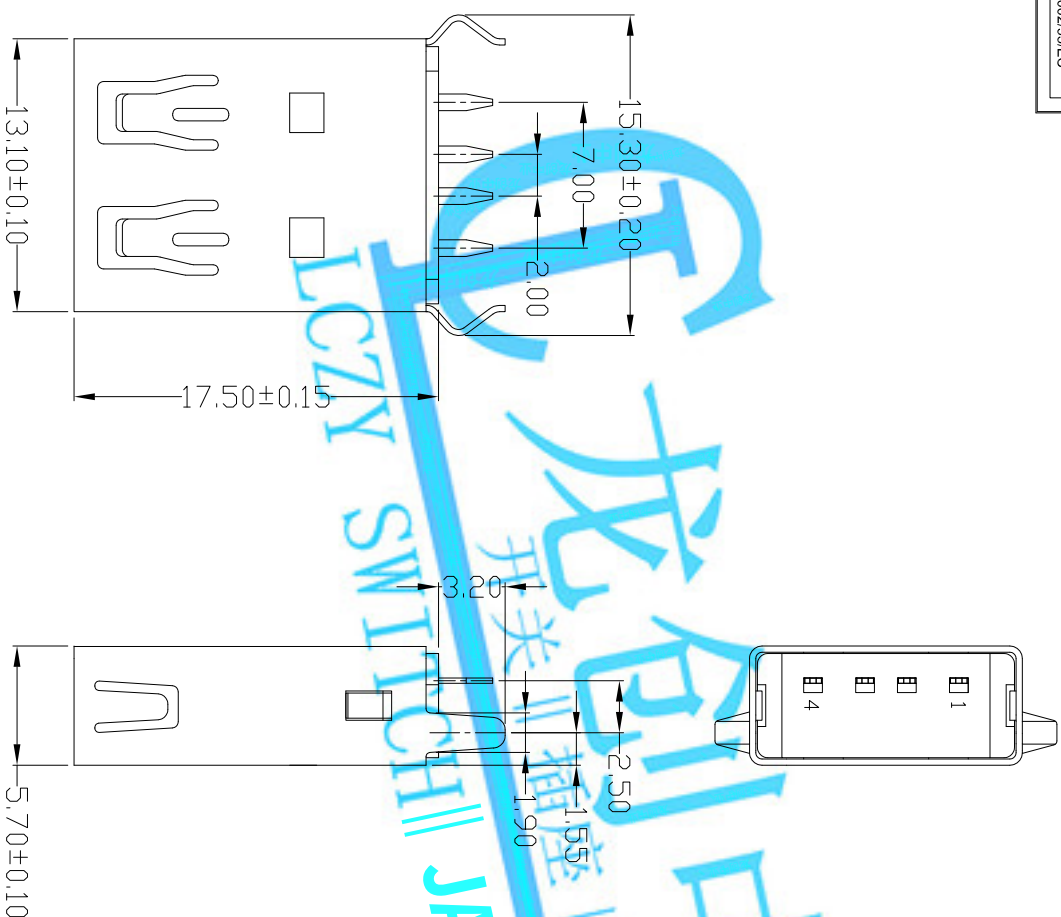

RECOMMENDED PCB LAYOUT

NOTES:
1. ELEC

1. ELECTRICAL:


- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 100M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN

3. NOTE:1.DIMENSIONS MARKED "▼"

TD BE CHECKED BY Q.C & IPQC.



3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY / SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
X. ±0.35		X. ±2°	UNITS	TITLE: USB AF DIP 180度 全包 无卷边弯脚有后盖 17.5					
X ±0.3		X. ±1°	MAT'L						
.XX ±0.25		.XX°	SEE NOTE						
.XXX ±0.15		.XXX°	FINISH						
			SEE NOTE						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				Q'TY		DWG NO.: AII-PZ21			
				CHKD: <i>Ricky</i> 2018/11/21		SCALE SHEET REV.			
APPD:				DWG NO.: AII-PZ21		1:1		1/1 B	
								CUSTOMER DRAWING	