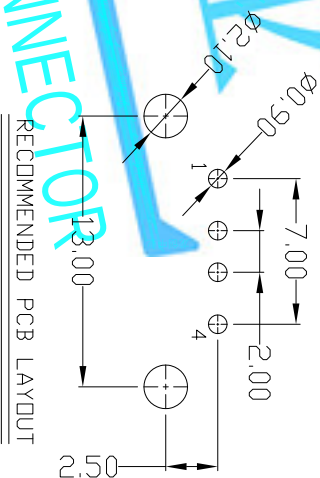
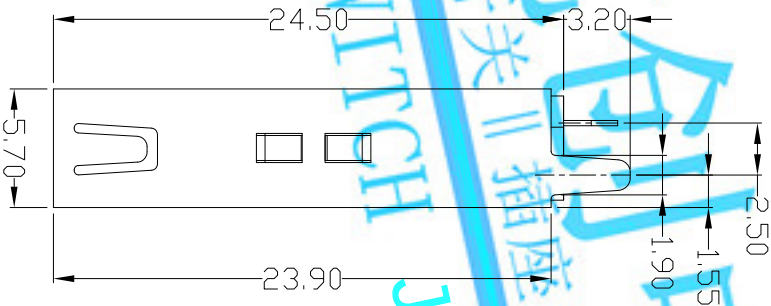
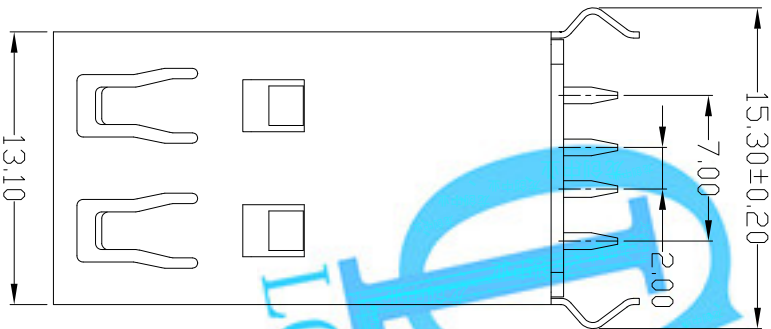



Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2'	UNITS	mm
X: ±0.3	X': ±1'	MAT'L	
.XX ±0.25	.XX'	SEE NOTE	
.XXX ±0.15	.XXX'	FINISH	
		SEE NOTE	
		Q'TY	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: USB AF DIP 180度 全包 无卷边弯脚有后塞 24.5		PART NO.: USAF-04XN-1XPZ219-S	
DR: Ricky 2018/11/23		DWG NO.: A11-PZ219-S	
CHKD: Ricky 2018/11/23		SCALE SHEET REV. B	
APPD:		CUSTOMER DRAWING	

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.
- 4.PART NO.