


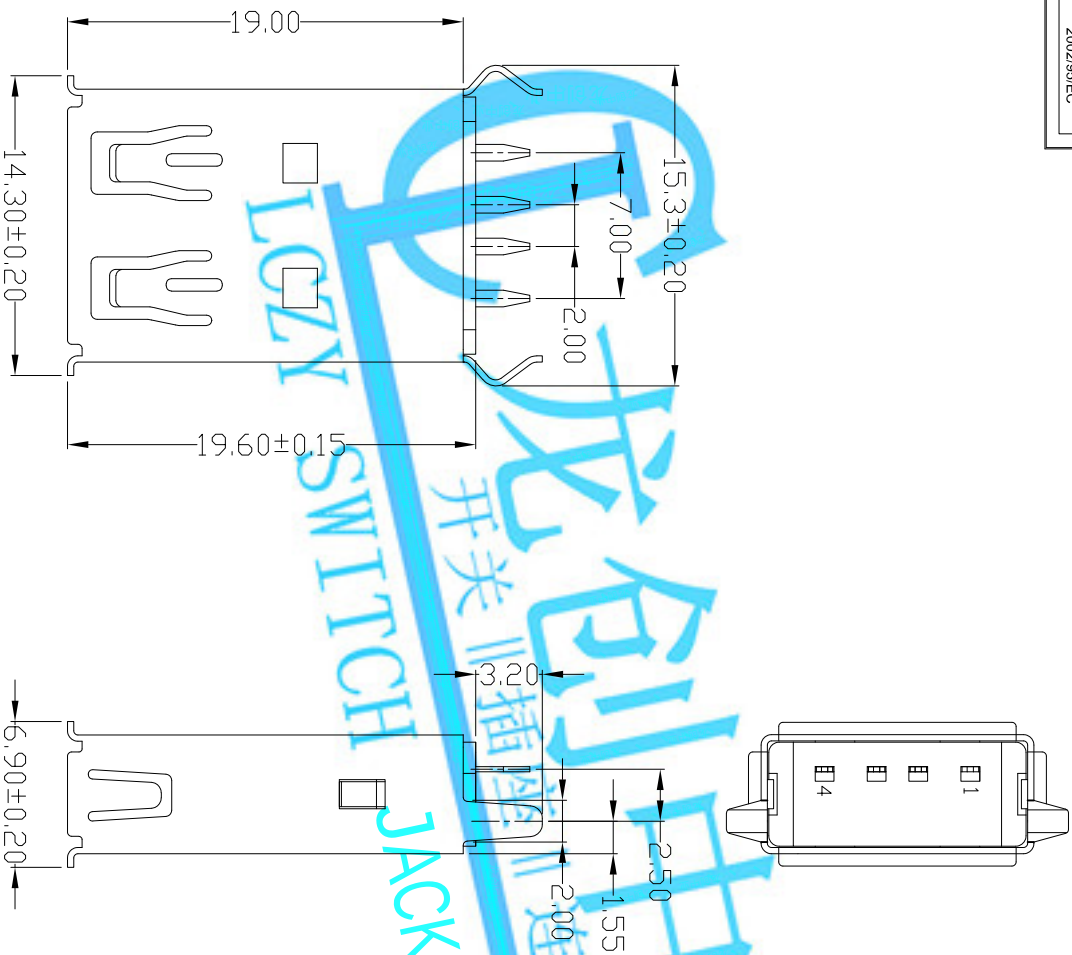

NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING: 2AMP,30V AC;

2) INSULATION RESISTANCE: 1000MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Umating Force: 10N MIN.

3. NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*1N-1*PZ26-S

1Au 1u" 6Au 30u"

W:WHITE B:BLACK 1PRT 2PA6T 3PA9T 4LCP

Bill of materials:

3	HOUSING	PBT+30%GF	1	UL 94V-0	
2	SHELL	SPCC	1	PLATED NICKEL	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	
ND	PARTS	MATERIAL	QTY	FINISHING	

X: ±0.35	X': ±2'	UNITS	mm
X ±0.3	X' ±1'	MAT'L	
.XX ±0.25	.XX'	SEE NOTE	
.XXX ±0.15	.XXX'	FINISH	
		SEE NOTE	
		Q'TY	
		DR: <i>Rudgy</i> 2018/11/21	
		CHKD: <i>Rudgy</i> 2018/11/21	
		APPD:	
		SCALE	1:1
		SHEET	1/1
		REV.	B
		CUSTOMER	DRAWING

TITLE:		PART NO.:	
USB AF DIP 180度 全包 卷边弯脚有后塞 19.6		USAF-04XN-1XPZ26-S	
DWG NO.:		ALL-PZ26-S	