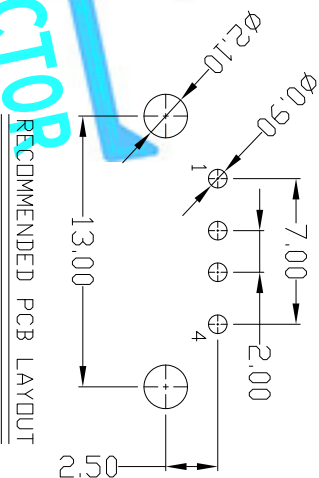

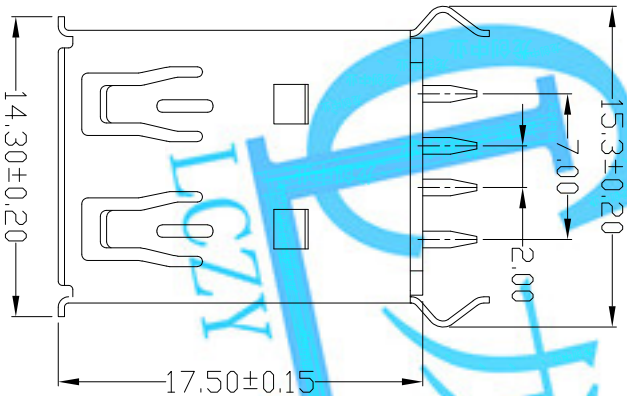



Bill of materials:

3	HOUSING	PBT+30%GF	1	UL 94V-0
2	SHELL	COPPER ALLOY / SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

X: ±0.35	X': ±2'	UNITS	mm
X: ±0.3	X': ±1'	MAT'L	
.XX ±0.25	.XX'	SEE NOTE	
.XXX ±0.15	.XXX'	FINISH	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDUSTECH INC.			
QTY	SEE NOTE	DR:	2018/11/21
CHKD:	2018/11/21	DWG NO.:	USAFA-04XN-1XPZZ20
APPD:	2018/11/21	SCALE	1:1
		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	

REV	LTR	DESCRIPTION	DATE	REVISER	APPD