




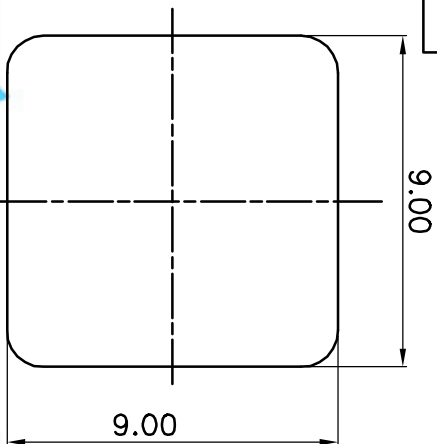


- Typical Specifications
- 1.Rating : DC 30V 0.3A
 - 2.Operating Force : 250 ± 50 gf
 - 3.Contact Resistance : 100mΩMAX
 - 4.Life : 100,000 Cycles Min



LEDcolour(LED 颜色)		Part No.(料号)
White(白色)		K6-6275D01
Red(红色)		K6-6275D02
Blue(蓝色)		K6-6275D03
Green(绿色)		K6-6275D04

Circuit Diagram

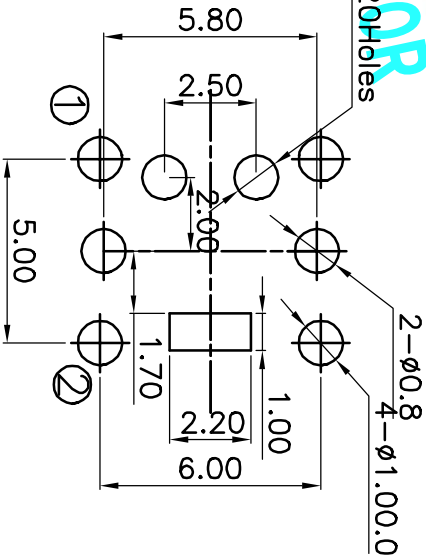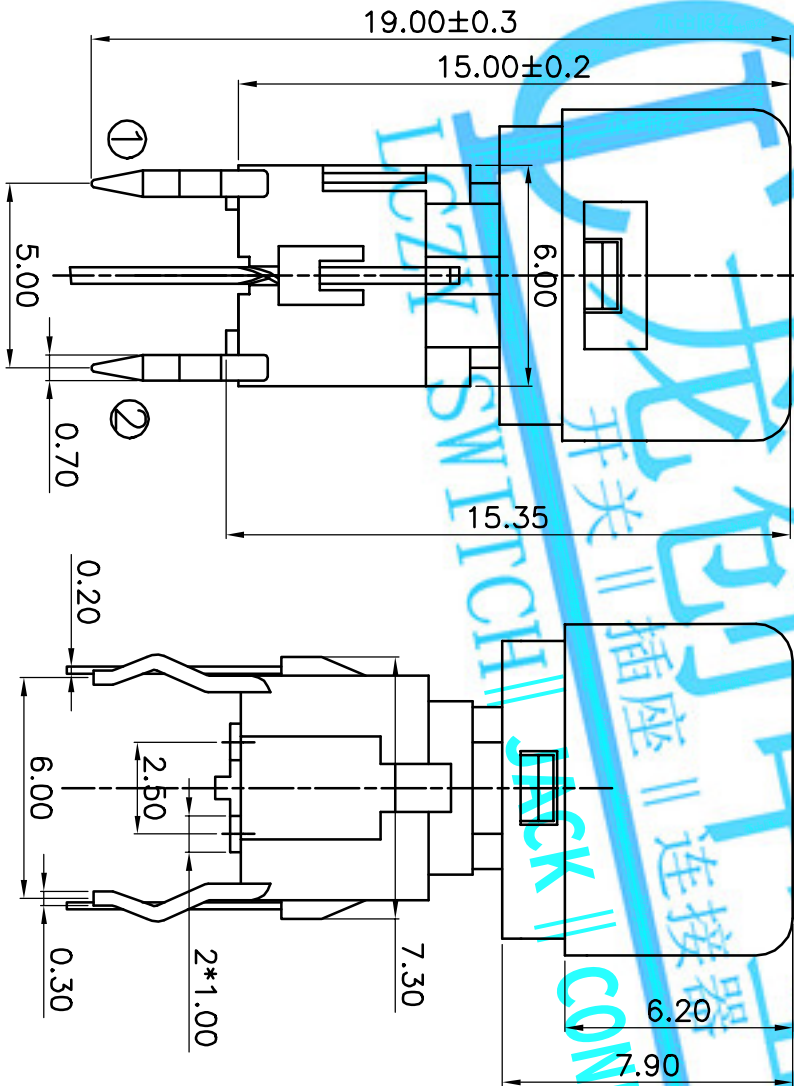

PCB layout pattern Side

②	Terminal	——	Phosphor bronze	Ag Plating	——	
①	Housing	——	Nylon	Black	——	
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	LCZY (HK) CO., LIMITED	
DRAWN	LIANKUN.LU	2018/08/01	

CHECKED		TITLE: LED Tact Switch	
APPROVALS		PART NO.	K6-6275D
TOLERANCES ARE		SCALE: 1:1	PROJ. 1 OF 1
30±0.1		UNIT: mm	
10~30		±0.20	
5~10		±0.15	
~ 5		±0.10	
±2°		DRAWING NO.	
CHANGE.		CHECK.	APPRO.
DESCRIPTION.		NEW	
REV.		DATE.	
ECN NO.		A	