


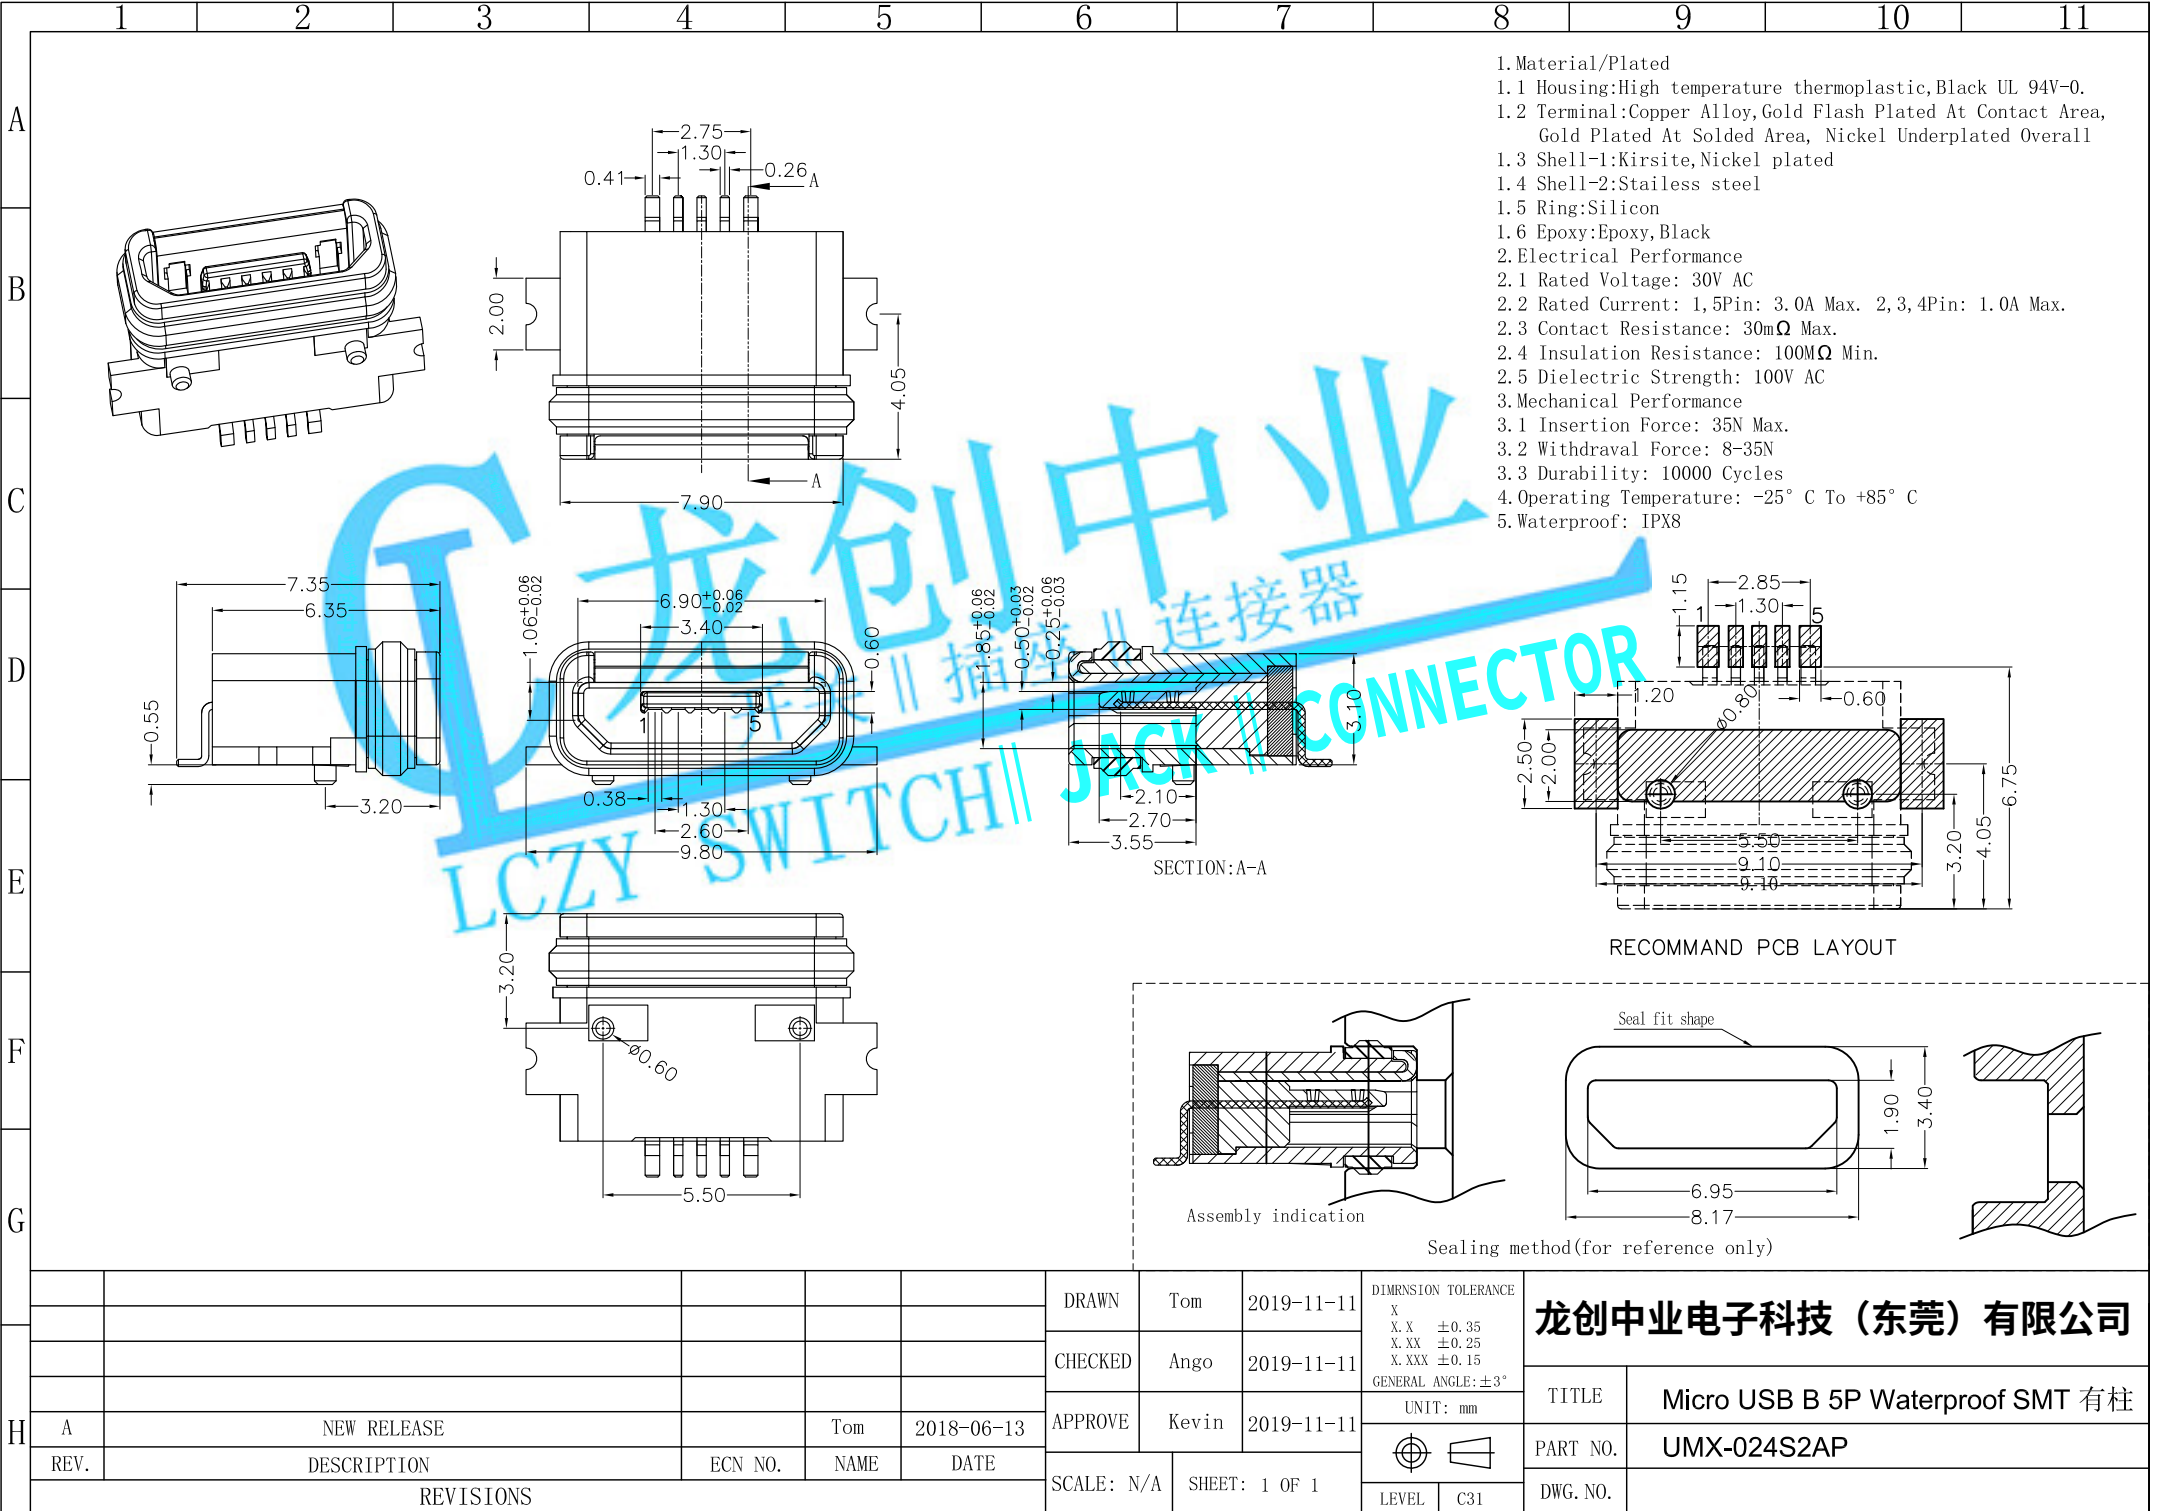

- 1. Material/Plated
 - 1.1 Housing: High temperature thermoplastic, Black UL 94V-0.
 - 1.2 Terminal: Copper Alloy, Gold Flash Plated At Contact Area, Gold Plated At Soldered Area, Nickel Underplated Overall
 - 1.3 Shell-1: Kirsite, Nickel plated
 - 1.4 Shell-2: Stainless steel
 - 1.5 Ring: Silicon
 - 1.6 Epoxy: Epoxy, Black
- 2. Electrical Performance
 - 2.1 Rated Voltage: 30V AC
 - 2.2 Rated Current: 1, 5Pin: 3.0A Max. 2, 3, 4Pin: 1.0A Max.
 - 2.3 Contact Resistance: 30mΩ Max.
 - 2.4 Insulation Resistance: 100MΩ Min.
 - 2.5 Dielectric Strength: 100V AC
- 3. Mechanical Performance
 - 3.1 Insertion Force: 35N Max.
 - 3.2 Withdrawal Force: 8-35N
 - 3.3 Durability: 10000 Cycles
- 4. Operating Temperature: -25° C To +85° C
- 5. Waterproof: IPX8

H						DRAWN	Tom	2019-11-11	龙创中业电子科技（东莞）有限公司	
						CHECKED	Ango	2019-11-11		
						APPROVE	Kevin	2019-11-11		
						SCALE: N/A	SHEET: 1 OF 1			
	A	NEW RELEASE		Tom	2018-06-13			TITLE	Micro USB B 5P Waterproof SMT 有柱	
	REV.	DESCRIPTION	ECN NO.	NAME	DATE			PART NO.	UMX-024S2AP	
	REVISIONS							LEVEL	C31	DWG. NO.